

LED

# KLEAN EDGE COVE BY FORUM

**QUICKSHIP**

**Klean Edge Cove** - A simplified & fully integrated cove lighting system now offered in a fast turnaround for quick solutions. Two weeks for standard features shown below. Now you have a clean-looking, simple easy-to-install solution for every time-sensitive cove project.

**Place your order today!**

**JOB:** \_\_\_\_\_ **TYPE:** \_\_\_\_\_

ORDERS UP TO 500'  
QUALIFY.


CONSULT FACTORY  
FOR PRICING.

ORDERS SHIP IN  
TWO WEEKS


## ORDERING CODE

KEC	LED	X	OPTION 1	OPTION 2				
PROFILE	LAMPING	SHIELDING	LENGTH	VOLTAGE	FINISH	OPTION 1	OPTION 2	
<b>S</b> Sabre	<b>65</b> 650 lm/ft	<b>30</b> 3000k temp	<b>SAT</b> Satin Lens	<b>2 3</b> 2' 3'	<b>120V</b>	<b>PR</b> Primer	<b>EC</b> Emergency Circuit	<b>D10V</b> 0-10V dimming
	<b>95</b> 950 lm/ft	<b>35</b> 3500k temp	<b>WOL</b> White Opal lens	<b>4 5</b> 4' 5'	<b>277V</b>	<b>WH</b> White	4' section only provided unless 2' or 3' individual is ordered	
	<b>110</b> 1100 lm/ft	<b>40</b> 4000k temp	<b>CAL</b> Clear Acrylic lens	<b>6 7</b> 6' 7'	<b>UNV</b> Universal	*EM battery packs and Lutron/other dimming driver options require an additional 2-3 weeks. Consult factory.		
	System Power Draw: 95LEDxx = 9.1W/ft 110LEDxx = 11.1W/ft		<b>8</b> 8'	<b>XX</b> Specify run length in even foot increments				

## OPTIONAL ACCESSORIES




90° INSIDE CORNER: 1' x 1'



90° OUTSIDE CORNER: 1' x 1'

## BODY PROFILES

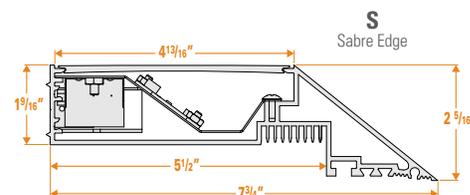

Sleek profile provides a sharp edge and an architectural feel.

Both 90° Inside and Outside corners are available. They can be used together with straight runs to make patterns in the field.

## SPECIFICATIONS

**HOUSING** 6063 T5 extruded aluminum profile approximately 2" x 8". Integrated features allow for seamless alignment over longer runs, easy installation and removal of geartrays and lens, and seamless integration into sheetrock construction.

**SHIELDING** Satin frosted, white opal, and clear acrylic lenses are snap in.

**GEARTRAY / REFLECTOR** Integrated geartray and reflector made from 20 GA cold rolled steel in a pre-paint white finish. Fully wired units remain completely accessible from above.

**DRIVER** Electronic, high power factor, low THD, driver used. 120V, 277V, and Universal Voltage available standard. Please consult factory for special driver requirements.

**LISTING** All fixtures bear an AFL-CIO/IBEW union label and are UL listed for recessed dry location. For alternative location configurations, please consult factory.

**INSTALLATION** Klean Edge offers unique field tailorable system that provides for +/- 6" of dimensional flexibility. Extrusions can be field cut and gear trays are telescopic. This allows the contractor to react to actual field conditions on the spot, reducing coordination issues.

Installation Guide available at [forumlighting.com](http://forumlighting.com)