



FORUM CORINTHIA RX-BEDLIGHT

JOB _____

TYPE _____

DESCRIPTION: The **FORUM/CORINTHIA RX** is a wall mounted lighting luminaire designed for patient comfort, staff efficiency, and years of dependable service. The luminaire is constructed with an extruded aluminum body and a 3/4" solid red oak furniture-finished facia. Forum/Corinthia RX provides indirect illumination that is glare free and contains a reading light that will not disturb other patients.

APPLICATIONS: Hospitals, Nursing Homes, over mirrors, sinks and desks.

MOUNTING: For hospital bed applications fixture should be 36" above the bed. An extruded mounting rail and leveling strip are provided, simplifying the mounting process.

SPECIFICATIONS:

Housing: Shall be a nominal 7 1/2" high x 5 1/4" deep consisting of heavy gauge aluminum extrusion 6063-T5 Alloy (.090" minimum wall thickness). All metal components are finished with baked enamel, minimum 86% Reflectance.

ENDS: Made from 3/4" thick red oak, mitered and returned fully to the back plate totally enclosing the luminaire.

LENS: Pattern 12 acrylic diffuser, (top and bottom).





REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% Reflectivity.

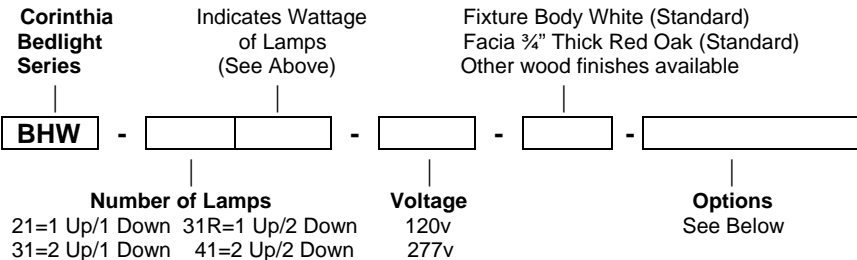
BALLAST: Ballast shall be energy saving CBM/ETL certified Class P. For electronic ballast add EL to catalog number.

DECORATIVE FACIA: Shall be solid 3/4" thick red oak, 7 1/2" wide, milled and knife cut to an attractive architectural front. The front surface and all edges of the facia shall have a coat of clear conversion varnish. The facia shall be mounted and permanently secured without visible fasteners.

SWITCHING: On-off pull chain is standard.

PRODUCT LISTING: Shall be U.L. listed.

	Catalog No.	T-8	T-5	T-5HO	Length
	BHW-21 (1 Up/1 Dn)	17 (17 watts)	14 (14 watts)	24 (24 watts)	32 1/2"L
		25 (25 watts)	21 (21 watts)	39 (39 watts)	42 1/2"L
		32 (32 watts)	28 (28 watts)	54 (54 watts)	54 1/2"L
	BHW-31 (2 Up/1 Dn)	17 (17 watts)	14 (14 watts)	N/A	32 1/2"L
		25 (25 watts)	21 (21 watts)		42 1/2"L
		32 (32 watts)	28 (28 watts)		54 1/2"L
	BHW-31R (1 Up/2 Dn)	17 (17 watts)	14 (14 watts)	N/A	32 1/2"L
		25 (25 watts)	21 (21 watts)		42 1/2"L
		32 (32 watts)	28 (28 watts)		54 1/2"L
	BHW-41 (2 Up/2 Dn)	17 (17 watts)	14 (14 watts)	N/A	32 1/2"L
		25 (25 watts)	21 (21 watts)		42 1/2"L
		32 (32 watts)	28 (28 watts)		54 1/2"L



OPTIONS:

EL = EXAMINATION LIGHT – 50" ADJUSTABLE, 60 WATT INCANDESCENT LIGHT GRAY LUMINAIRE WITH A 4 RING LOUVER.

EL2 = EXAMINATION LIGHT – 50" ADJUSTABLE, 22 WATT CIRCULAR FLUORESCENT TUBE AND A 60 WATT INCANDESCENT LIGHT GRAY LUMINAIRE WITH A 6 RING LOUVER.

EL3 = EXAMINATION LIGHT – 47" ADJUSTABLE, 12 VOLT, 20 WATT HALOGEN. BLACK WITH BRUSHED CHROME JOINTS. NOTE: ALL EXAM LIGHTS SUPPLIED WITH A GROUND CONVENIENCE OUTLET. THE GCO IS LOCATED AT THE END OF UNIT.

IV = SWIVEL I.V. ARM WITH ONE HOOK. STAINLESS STEEL ARM IS .29" DIA. WITH 25" EXTENSION.

IV2 = SWIVEL I.V. ARM WITH TWO HOOKS. SAME DIMENSIONS AS ABOVE.

GCO = GROUND CONVENIENCE OUTLET. LOCATED AT THE END OF THE UNIT.

NL = NIGHT LIGHT CANDELABRA SOCKET FOR A 7W MAXIMUM LAMP. NOTE: REQUIRES 6" WIDE FIXTURE. CONSULT FACTORY.

NLT = NIGHT LIGHT WITH TOGGLE SWITCH. SAME AS ABOVE WITH TOGGLE SWITCH. NOTE: REQUIRES 6" WIDE FIXTURE. CONSULT FACTORY.

4POS = 4 POSITION PULL CHAIN – 1. TOP LIGHT ON 2. BOTTOM LIGHT ON 3. ALL LIGHTS ON 4. ALL LIGHTS OFF.