



Customer Name	Date
Project Name	
Catalog Number	

## Forecast Z Series

4Z, 4Z Asymmetric, 4Z Regressed

The Forecast Z series by Forum is a line of recessed luminaires designed to accommodate unique grid ceilings, such as Techzone. Forecast's unique hybrid construction features a sheet metal housing with aluminum trim, reducing fixture weight and cost without sacrificing premium fit and finish. Available in 2 1/2" aperture, 3 1/2" asymmetric aperture and a 2 1/2" aperture with 1" regressed lens. Current's patented TriGain® phosphor delivers 90 CRI color quality at 80 CRI efficacy.

## Ordering

		LED											
		lm/ft	CCT										
DISTRIBUTION	PROFILE	OUTPUT		SHIELDING	LENGTH	VOLTAGE	FINISH	OPTION 1	OPTION 2	OPTION 3	OPTION 4		
SRZ-44 4" width	FG 9/16" grid	65	27	SAT Satin Lens	2 2'	120V	WH White	90 CRI 90 CRI	EMLED LED battery pk	EC Emergency Circuit			
	TG 15/16" grid	650 lm/ft 6.5 input watts/ft*	2700k temp 93.5% Special order option	WOL White Opal Lens	3 3'	277V	SV Silver	CP Chicago Plenum	SW Separate Switch	F Fusing			
SRZ-44ASY Asymmetric	BG slot grid	95	30	SAP Satin Lens over Parabolic Baffle*	4 4'	UNV Universal	BK Black	MR 37 MAX MR Module * SRZ-44 and SRZ-44REC only	ADJ Adjustable	DL Damp Location			
	F 1/2" flange	950 lm/ft 9.5 input watts/ft*	3000k temp 95.2%	WOP White Opal Lens over Parabolic Baffle*	5 5'		CC Custom Color	DIMMING OPTIONS (CHOOSE 1)					
SRZ-44REC Recessed	FF flange-free sheetrock	* Assumes 4000k w/ satin lens	35 3500k temp 96.8%	* SRZ-44 only	6 6'		Provide custom color RAL#:	D10V 0-10V dimming 1% power class	DLA2 Lutron Hi-lume 1% 2-wire LED driver (120V forward phase only)	DLA3 Lutron Hi-lume 1% 3-wire LED driver			
		Lumen Multiplier = % of 4000K	40 4000k temp 100%		7 7'	DLEH5 Lutron Hi-lume 1%-H EcoSystem LED driver with soft-On, Fade-to-Black		DALI Digitally Addressable Lighting Interface	DIM Dimming: Please specify dimming manufacturer/model (if required)				
		Consult factory for limitations	50 5000k temp 103%		8 8'	PTRN custom pattern*							
		Custom Output				Specify continuous run length:							
		LED				Standard run length in even foot increments.							
		lm/ft	CCT			Units ordered as individual units cannot be joined in field to create runs.							
		460-1610 lm/ft				* See pattern worksheet							

- 1 60 option available with 40 Fixture Length only  
2 90 option available with 60 Fixture Length only  
3 A2 option available with 80 Fixture Length only

- 4 10ft aircraft cables with grippers and hourglass sleeves  
pre-installed. Canopy kits ordered separately  
5 G2 option available with 60 Fixture Length and 90 Lumen  
Output options only

- 6 10ft Power cord included. 300V 18AWG, 5-Conductor wire  
7 Power cord not required for G2 mounting option



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name	Date
Project Name	
Catalog Number	


## CONTROLS & SENSORS

Ordering Code	Description
OCC	Wattstopper occupancy sensor
DPS	Wattstopper daylight photo sensor
LVS	Lutron Vive integrated fixture sensor (occ+daylight)
LVR	Lutron Vive integrated fixture sensor (radio only)
ELM	Enlighted micro sensor
OES	Osram SensiLUM
OEC	Osram Encelium CLM
OED	Osram CLM DEXAL
C110	Casambi (1x 010v)
C210	Casambi (2x 010v)
CRGBW	Casambi (RGBW)

## DIMMING OPTIONS

Ordering Code	Description
D10V	0-10V Dimming, 1% power class
DLA2	Lutron Hi-lume 1% 2-1ire LED driver (120V forward phase only)
DLA3	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DLA5	Lutron Hi-lume 1% EcoSystem LED driver
DLEH5	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DALI	Digitally Addressable Lighting Interface
DIM	Custom Dimming. Please specify dimming manufacturer/model

## 2. OPTIONAL ACCESSORIES



90° HORIZONTAL CORNER



90° OUTSIDE TRANSITION



90° INSIDE TRANSITION

\* Consult factory for additional corner options



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name

Date

Project Name

Catalog Number




## Drawings

**SRZ-44**  
**4" W**




**SRZ-44ASY**  
**4" W**

**SRZ-44REC**  
**4" W**




**FG**  
9/16" Grid






**TG**  
15/16" Grid



**BG**  
(Bolt Slot Grid)



**F**  
(1/2" Overlap  
Flange)



**FF**  
(Flange-Free)



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name

Date


Project Name

Catalog Number

## PATTERN WORKSHEET


Please use this worksheet to specify your continuous run SRT or SRZ patterns. Please use the next page for all PER patterns.

### Horizontal Corners

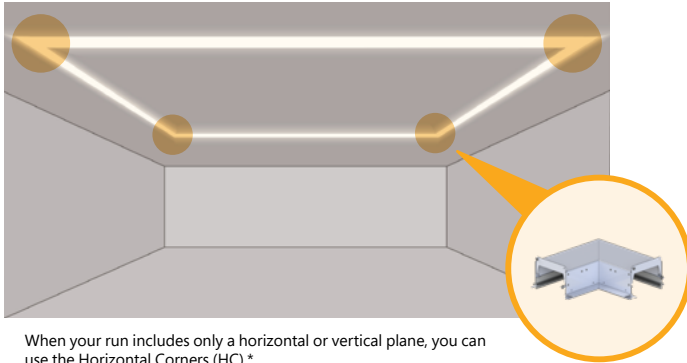


When your run includes only a horizontal or vertical plane, you can use the Horizontal Corners (HC).\*

### Multi-plane Transition Corners

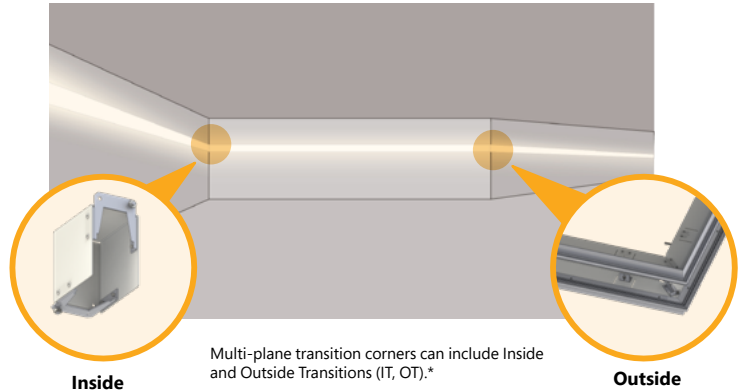


Multi-plane transition corners can include Inside and Outside Transitions (IT, OT).\*

### Wall-to-Ceiling Transitions Corners

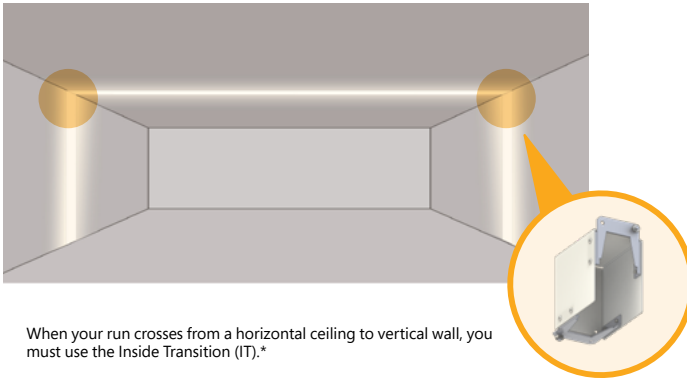

When your run crosses from a horizontal ceiling to vertical wall, you must use the Inside Transition (IT).\*


### Example Pattern

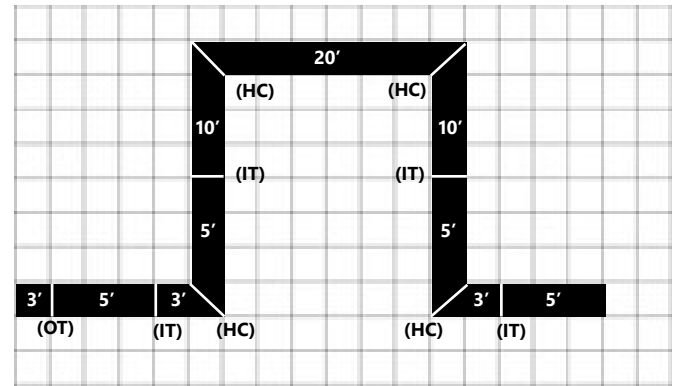

OT = 1 HC = 4 IT = 4 Linear Run = 69'

\* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

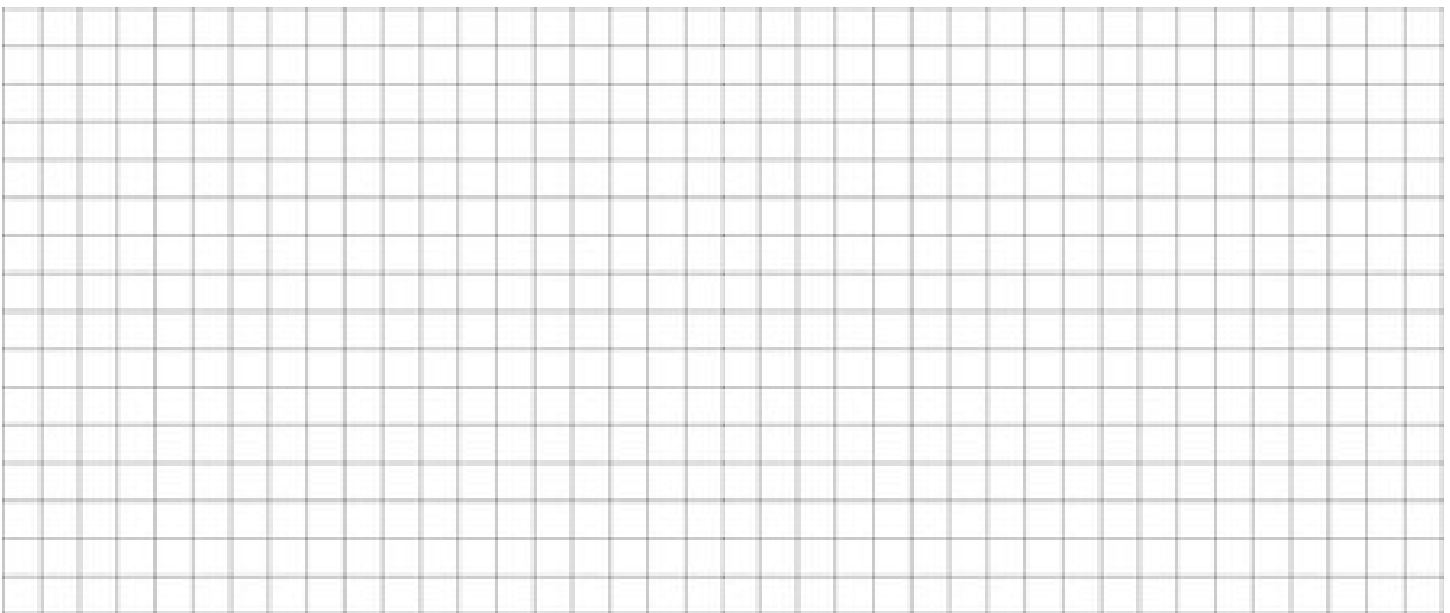

OT = HC = IT = Linear Run =

\* 90 degree standard



Please use this worksheet to specify all PER patterns. Please use the previous page for your continuous run SRT or SRZ patterns.

Perimeter corners can include  
Inside and Outside (IC, OC).\*

## Inside

## Outside

A diagram of a square frame on a grid. The top horizontal member is labeled 20'. The left vertical member is labeled 15'. The right vertical member is labeled 15'. The bottom horizontal member is labeled 15'. The corners are labeled (iC) at the top-left and top-right, and (OC) at the bottom-left and bottom-right. The frame is drawn with thick black lines.

OC = 2    IC = 2    Linear Run = 80'

\* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.

OT =          HC =          IT =          Linear Run =

\* 90 degree standard




# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed


Customer Name	Date
Project Name	
Catalog Number	

## CORNER OPTIONS


### Horizontal Corners

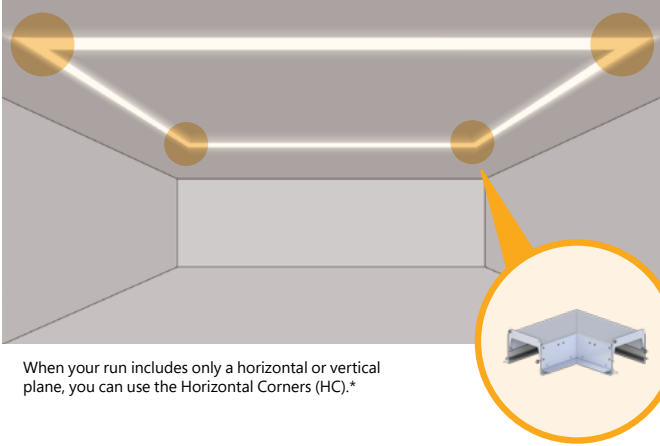


### Wall-to-Ceiling Transitions Corners

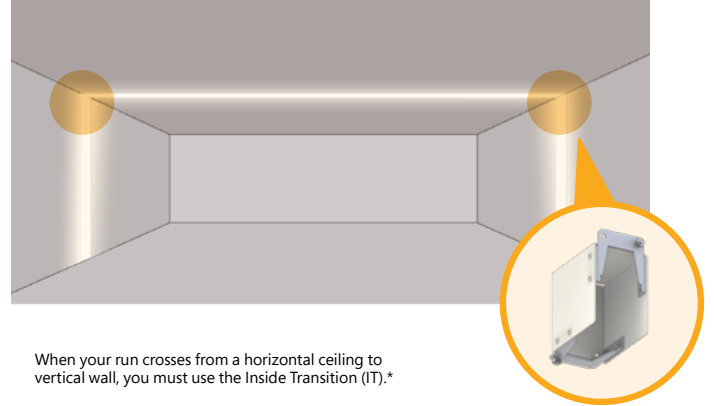

### Multi-plane Transition Corners

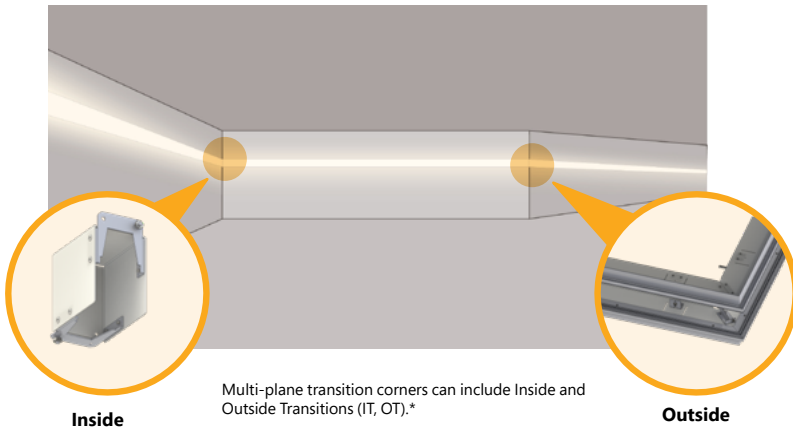

### Perimeter Corners

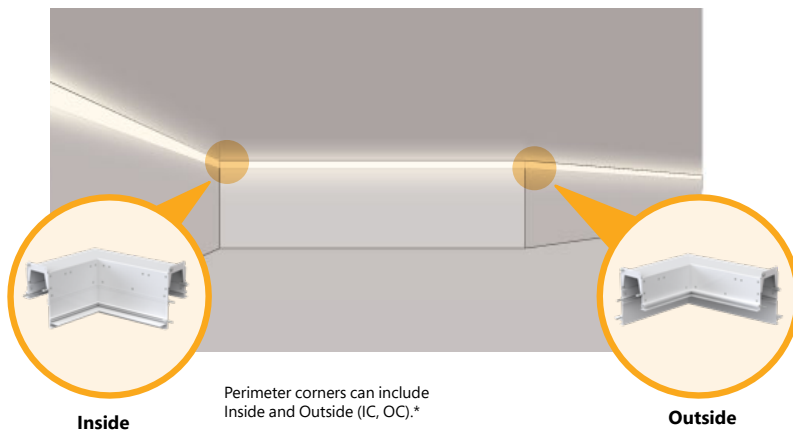

\* 90 degree standard



# Forecast Series


4Z, 4Z Asymmetric, 4Z Regressed

Customer Name	Date
Project Name	
Catalog Number	

## CEILING GRID

Use the guide below to determine the proper ceiling grid placement for installation of the FG/TG and BG profiles.


**SRT, SRT REC, SRT ASY  
FG/TG**

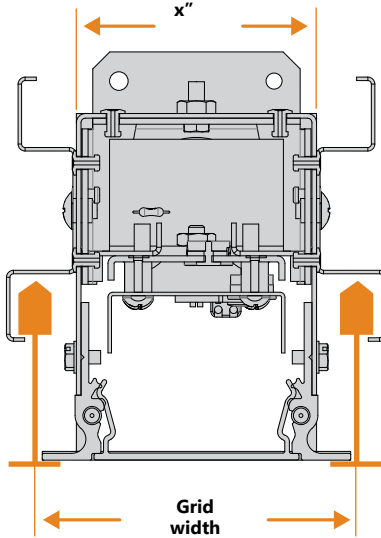

$$\text{Grid width} = x'' + 7/8''$$

Use the width (x) provided in the charts on pages 5–7 of this document, and add 7/8".


**SRT, SRT REC, SRT ASY  
BG**

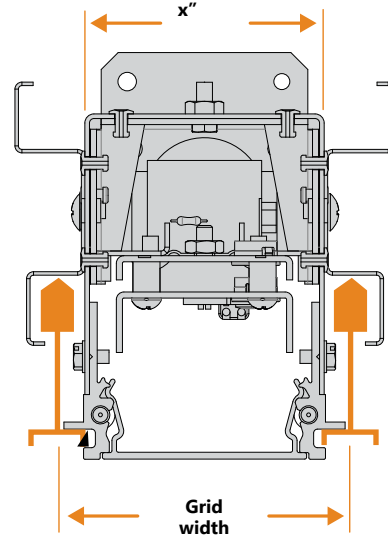

$$\text{Grid width} = x'' + 5/8''$$


Use the width (x) provided in the charts on pages 5–7 of this document, and add 5/8".

**SRZ, SRZ ASY, SRZ REC  
FG/TG**

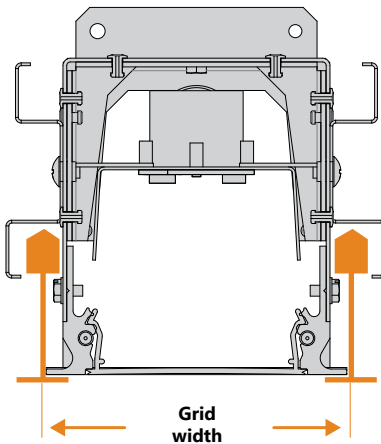

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:  
SRZ-44 ceiling grid width: = 4"  
SRZ-46 ceiling grid width: = 6"

**SRZ, SRZ ASY, SRZ REC  
BG**

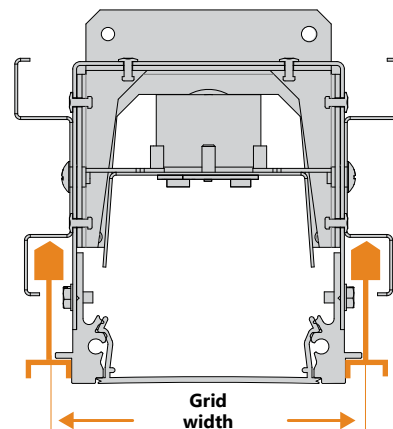

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:  
SRZ-44 ceiling grid width: = 4"  
SRZ-46 ceiling grid width: = 6"



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name

Date


Project Name

Catalog Number

## ENVIRONMENT INTERFACE SPECS


Each Forecast (SRT) series fixture is designed for a specific mounting application. Lamping, wiring, and continuous run assembly is universal across the family of fixture profiles. For more information, please consult complete Installation Instructions, available online.

### FF (Flange-free) installation

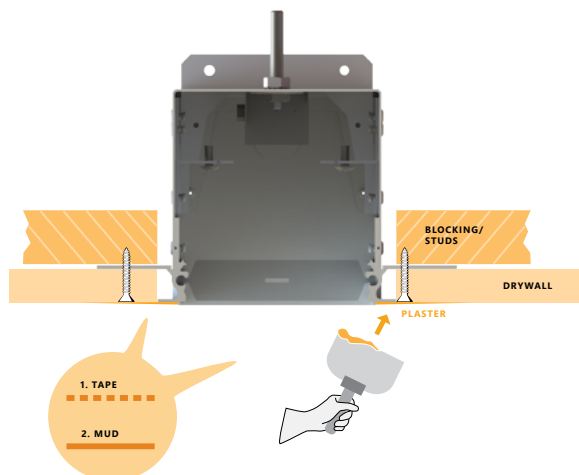



The FF (Flange-Free) fixture is installed prior to drywall installation.

### F (1/2" Overlap) installation

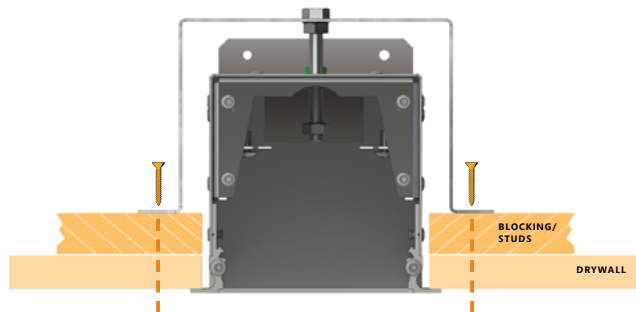

The F (1/2" Overlap) fixture is installed after drywall installation.

### Fg/BG/TG Grid installation

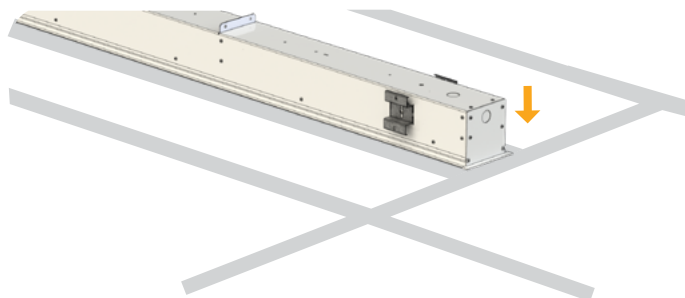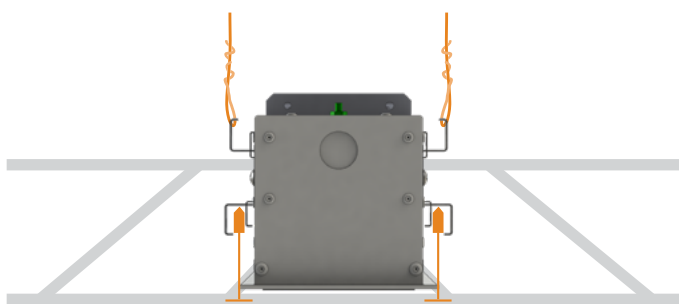

The FG/TG/BG fixture is installed within a ceiling grid system.






# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed



Customer Name	Date
Project Name	
Catalog Number	

## Components and Assembly

### JOINING HARDWARE

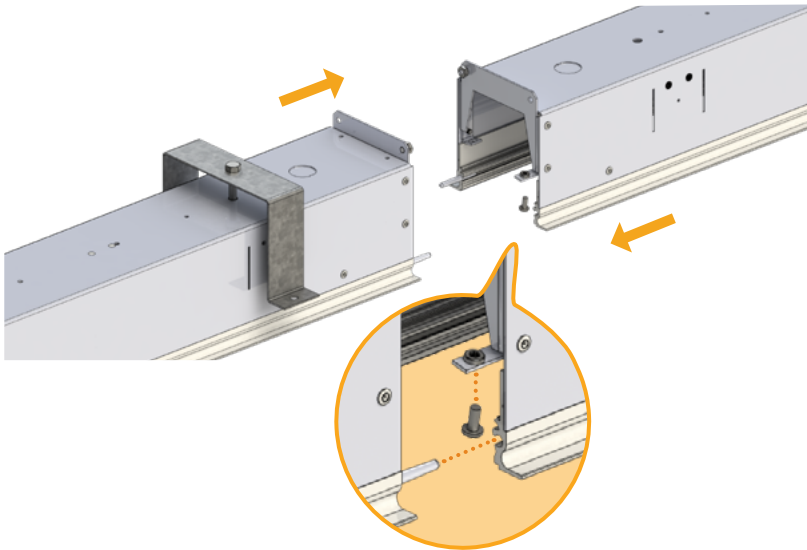


Alignment pins engage the housing profile of the adjoining units. Gasket strips along the exposed faces ensure a true fit and prevent light leak.

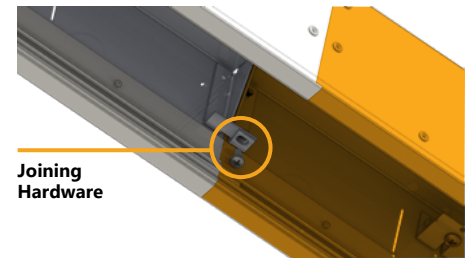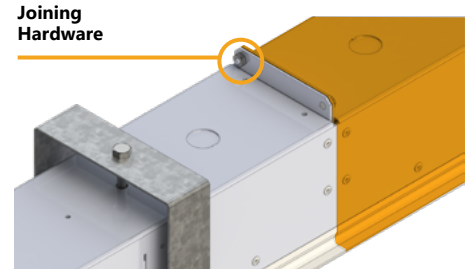

Supplied hardware draws the pieces together tightly.


### LENS DETAIL

#### Snap-in Method

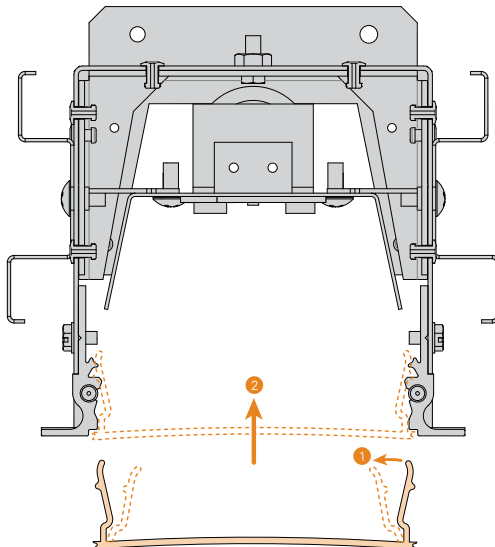

For Snap-in Lenses, gently squeeze the sides (1) while lifting into place (2). Lens will snap into position.

#### Lift-and-Shift Method

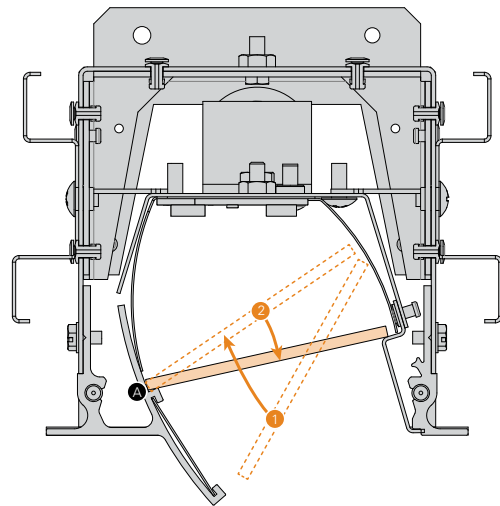

For Lift-and-Shift Lenses (used on Regressed, Perimeter, and Asymmetrical fixtures), lift lens into housing (1), rest on point A, then lower into place (2).



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name

Date

Project Name

Catalog Number


## Photometrics

### Logic/Config

#### Forecast 4z-Series, Asymmetric

3840 Lumens

SRZ-44ASY-TG-95LED40-CFA X 4'-WH

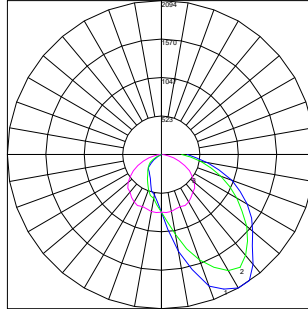

Maximum Candela = 2093.91 Located At Horizontal Angle = 0, Vertical Angle = 30  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Vertical Plane Through Horizontal Angles (45 - 225)  
# 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	342.36	8.90
0-30	814.10	21.20
0-40	1450.23	37.80
0-60	2784.04	72.50
0-80	3645.15	94.90
0-90	3839.79	100.00

ZONE	LUMENS	% OF FIXTURE
10-90	3761.49	98.00
20-40	1107.87	28.90
20-50	1797.93	46.80
40-70	1846.27	48.10
60-80	861.10	22.40
70-80	348.65	9.10
80-90	194.64	5.10
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	3839.79	100.00



# Forecast Series

4Z, 4Z Asymmetric, 4Z Regressed

Customer Name

Date

Project Name

Catalog Number

## CONSTRUCTION

**Housing:** Extruded aluminum, machined endcaps

**Lens:** Satin frosted, and white opal lenses. Aluminum parabolic baffles in a variety of finishes.

**Optical Assembly:** .040" aluminum in a pre-paint white finish. Fully wired unit remains completely accessible from below via ballast panel.

**Paint:** Black, White, Silver, Custom Color

## OPTICAL SYSTEM

**Lumens:** 460-1610 lm/ft

**Distribution:** Asymmetric Direct

**Efficacy:** Up to 96 LPW

**Wattage:** 6.5 - 9.5 watts/ft

**CCT:** 2700k, 3000K, 3500K, 4000K, 5000K

**CRI (Min):** TriGain® 90CRI

**R9 (Min):** 65

**Color Consistency:** 2SDCM

## ELECTRICAL

**Input Voltage:** 120V, 277V, Universal Voltage

**Input Frequency:** 50/60Hz

**Power Factor (PF):** >0.9

**Total Harmonic Distortion (THD):** <16% - 120V  
<20% - 277V

**Thermal Protection:** Type IC Inherently Protected

**Temperature / Humidity:** Suitable for Damp Locations

**Transient Protection:** All Non-Lutron = 2.5KV  
Lutron = 4KV

## CONTROLS

**Dimming:** 0-10V 1% power class; Lutron Hi-lume 1% 2-wire LED driver; Lutron Hi-lume 1% 3-wire LED driver; Lutron Hi-lume 1% EcoSystem LED driver; Lutron Hi-lume 1%-H EcoSystem LED driver with soft-On Fade-to-Black; Lutron 5-Series EcoSystem LED driver; Digitally Addressable Lighting Interface; Custom Dimming

## OPERATING TEMPERATURE

Product	Operating Temperature
<b>STD (Non-EM) Options</b>	-30-25°C (-22-77°F)
<b>3/4/6in w/Battery</b>	0-25°C (32-77°F)

## LUMEN MAINTENANCE

- L70>50K Hours

## MOUNTING

- Recessed
- Hard Ceiling
- Flange-free Sheetrock
- Multiple Tegular Grid Ceiling Options (see pg 7)

## DESIGN LIFE & WARRANTY

### Warranty:

- LED boards - 5 years
- LED drivers (standard) - 5 years
- LED drivers (Lutron) - 3 years



**TriGain**  
technology

For Product or Technical Questions:

E: INFO@FORUMLIGHTING.COM  
T: +1 412 781 5970