



FORUM CORINTHIA LINEAR DIRECT/INDIRECT



JOB _____

TYPE _____

DESCRIPTION: The **FORUM/CORINTHIA HANG MOUNT LINEAR DIRECT/INDIRECT** fixture provides an indirect general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers and Corridors.

MOUNTING HEIGHTS: The top of the fixture to ceiling should be a minimum of 18" for all fixtures (see mounting sheet for detail information).

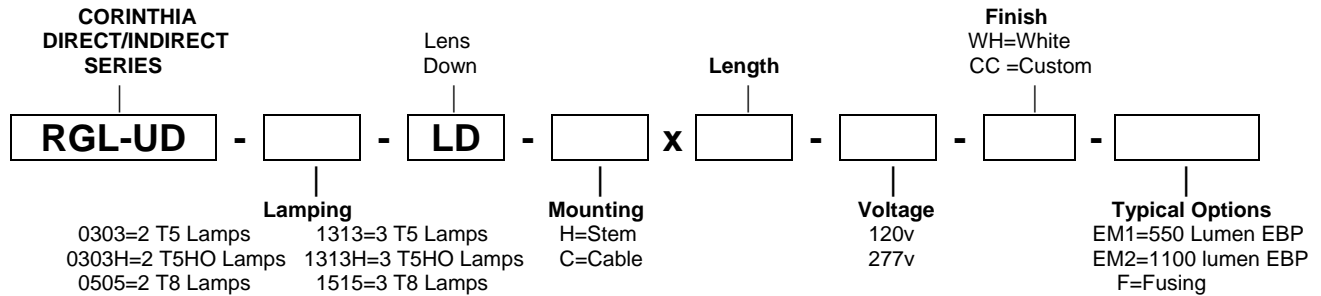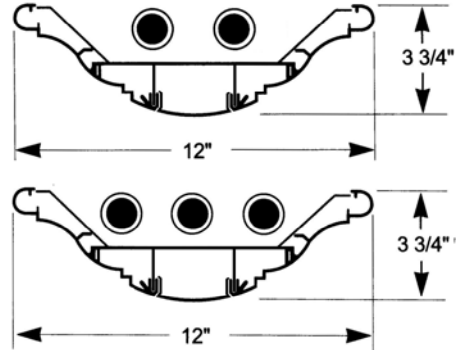

SPECIFICATIONS:

The **FORUM//CORINTHIA HANG MOUNT LINEAR DIRECT/INDIRECT** housing shall be a nominal 3 3/4" high x 12" wide consisting of heavy gauge aluminum extrusion 6063-T5 alloy(.090" minimum wall thickness). Sockets shall be prewired and factory installed. The ends shall be .250" thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized.

LENS: Shall be a custom designed opal acrylic with 20% D.R.

REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

BALLAST: Ballast shall be electronic CBM/ETL certified Class P.

PRODUCT LISTING: Shall be U.L. listed.