





SWD & SAD-05 (265 MA, T-8)
 SWD & SAD-10 (430 MA, T-12)
 SWD & SAD-30 (800 MA, T-12)

DESCRIPTION: The FORUM/FORECAST fixture provides general, direct or task lighting where high levels of illumination are required to meet specific task requirements.

APPLICATIONS: Classrooms, Office Areas, Libraries, Churches, Hospitals, Retail Stores, and auditoriums.

MOUNTING HEIGHTS: Minimum mounting height for general illumination should be 8 ft. For task lighting, minimum distance should be 3 ft. (see mounting sheet for detail information).

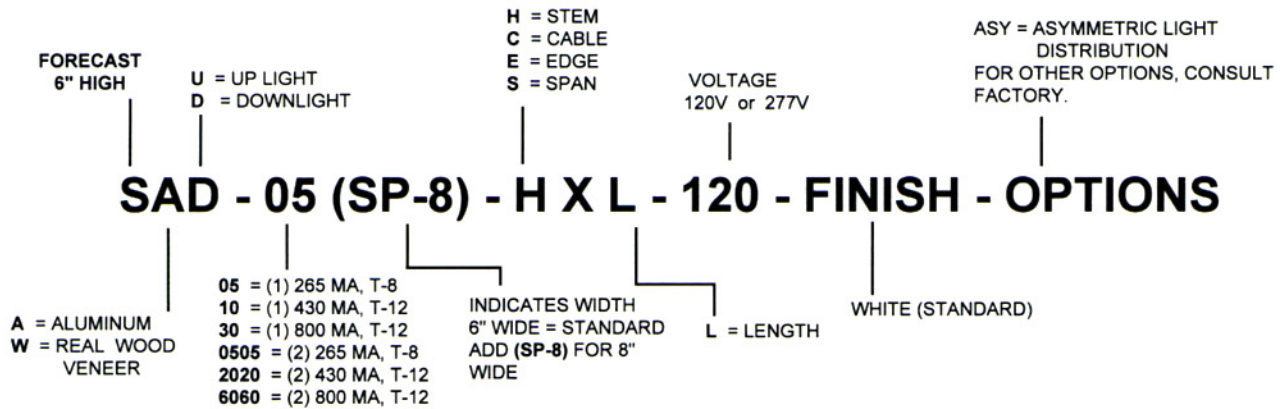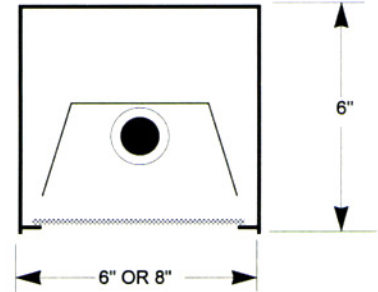

SPECIFICATION:

The FORUM/FORECAST housing shall be a nominal 6 inches high x 6 inches wide with the sides and bottom consisting of heavy gauge aluminum extrusion 6063-T5 alloy (.090" minimum wall thickness) Sockets shall be prewired and factory installed. The ends shall be .250 inch thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized and real wood veneers available in 6" sides.

REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

LENS: prismatic acrylic (standard)

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P. For electronic ballast add EL. to Cat. No.

PRODUCT LISTING: Shall be U.L. listed.

CANDLEPOWER SUMMARY

CATALOG NO.: SAD-10
 LAMP TYPE: F40T12RS/WW
 LUMENS: 3200
 FIXTURE EFFICIENCY: 62.4%
 LUMINAIRE INPUT WATTS: 52
 TEST REPORT NO.: I.T.L. 22539 MOD

ANGLE	CANDELA
180	0
175	0
165	0
155	0
145	0
135	0
125	0
115	0
105	0
90	0
85	3
75	31
65	90
55	245
45	450
35	631
25	703
15	782
5	800
0	790