





SAY-0505 (265 MA, T-8)
SAY-2020 (430 MA, T-12)

DESCRIPTION: The FORUM/FORECAST fixture provides an indirect general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

MOUNTING HEIGHTS: The top of the fixture to ceiling should be a minimum of 14" for all fixtures (see mounting sheet for detail information).

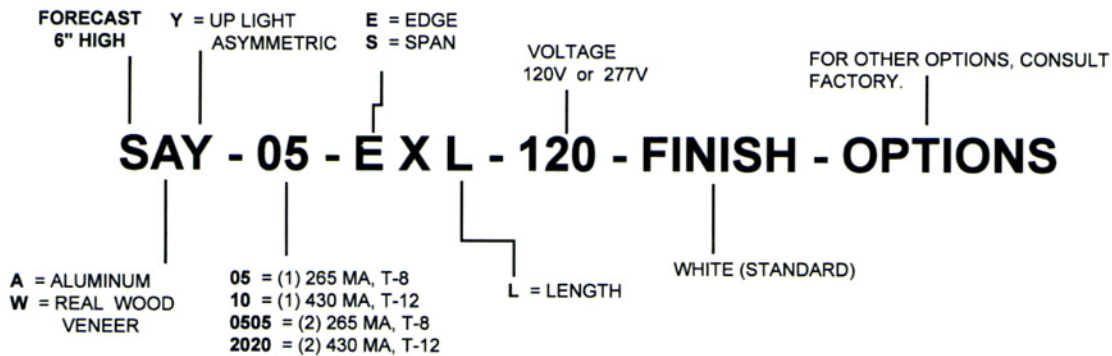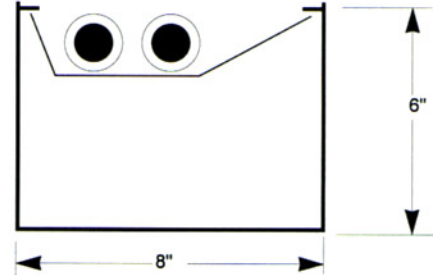

SPECIFICATION:

The FORUM/FORECAST housing shall be a nominal 6 inches high x 8 inches wide with the sides and bottom consisting of heavy gauge aluminum extrusion 6063-T5 alloy (.090" minimum wall thickness) Sockets shall be prewired and factory installed. The ends shall be .250 inch thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized and real wood veneers available in 6" sides.


REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P. For electronic ballast add EL to Cat. No.

PRODUCT LISTING: Shall be U.L listed.

CANDLEPOWER SUMMARY

CATALOG NO.: SAY-2020
LAMP TYPE: F40T12WW/RS
LUMENS: 3200
FIXTURE EFFICIENCY: 69.1%
LUMINAIRE INPUT WATTS: 89
TEST REPORT NO.: B.A.L . 4143.0



ANGLE CANDELA LUMENS

180	1517	
175	1638	150
165	1701	431
155	1690	647
145	1625	778
135	1406	783
125	1112	717
115	802	544
105	486	301
95	102	73
90	0	
85	0	0
75	0	0
65	0	0
55	0	0
45	0	0
35	0	0
25	0	0
15	0	0
5	0	0
0	0	