





SWU & SAU-0505 (265 MA, T-8)
 SWU & SAU-2020 (430 MA, T-12)
 SWU & SAU-6060 (800 MA, T-12)

DESCRIPTION: The FORUM/FORECAST fixture provides an indirect general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

MOUNTING HEIGHTS: The top of the fixture to ceiling should be a minimum of 18" for all fixtures (see mounting sheet for detail information).

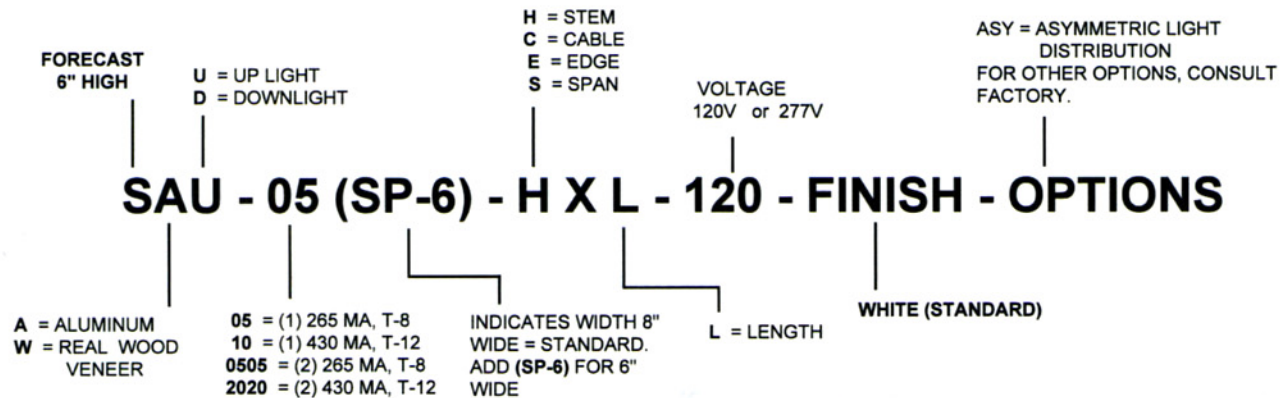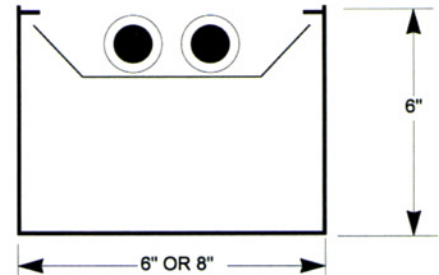

SPECIFICATION:

The FORUM/FORECAST housing shall be a nominal 6 inches high by 8 inches wide with the sides and bottom consisting of heavy gauge aluminum extrusion 6063-T5 alloy (.090" minimum wall thickness) Sockets shall be prewired and factory installed. The ends shall be .250 inch thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized.


REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P. For electronic ballast add EL to Cat. No.

PRODUCT LISTING: Shall be U.L. listed.

CANDLEPOWER SUMMARY

CATALOG NO.: SAU-2020
 LAMP TYPE: F40T12WW/RS
 LUMENS: 3200
 FIXTURE EFFICIENCY: 73.2 %
 LUMINAIRE INPUT WATTS: 84
 TEST REPORT NO.: I.T.L. 23199

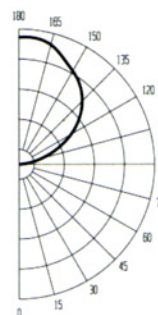

ANGLE CANDELA	
180	1502
175	1510
165	1497
155	1406
145	1323
135	1169
125	939
115	620
105	269
95	56
90	0
85	0
75	0
65	0
45	0
35	0
25	0
15	0
5	0
0	0