




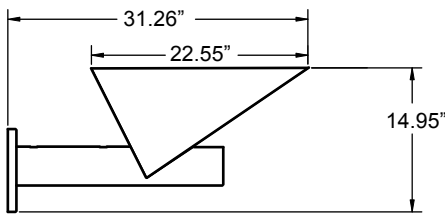

FORUM LIGHTING QUASAR

ANGLE SHROUD WALL BRACKET MOUNT

PROJECT _____ TYPE _____ CATALOG # _____

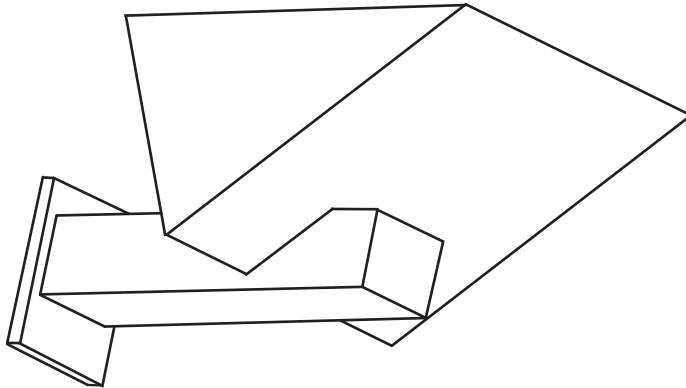

SPECIFICATION:

FIXTURE BODY: Shall be .125" thick extruded 6063 -T5 aluminum with external surface ribbing for improved heat dissipation which will prolong lamp life. The standard finish for the housing is white. The end plates shall be .375" thick aluminum, gasketed and mechanically attached to the housing. The ends shall be painted white (standard).

LENS AND FRAME: Shall be .125" thick high temperature clear patterned tempered glass. The extruded aluminum frame shall be gasketed and secured to the housing by four (4) captive screws. The frame shall be white (standard).

REFLECTOR: Shall be highly polished, multifaceted prefocused anodized aluminum.

SHROUD: Shall be fabricated from 18 gauge steel. The shroud shall be die formed, welded, and ground smooth to provide a seamless finished appearance. Standard finish shall be white. Custom finishes available.

WALL MOUNTING BRACKET: Shall be die formed from 18 gauge C.R.S.. Standard finish is white.

PRODUCT LISTING: Shall be U.L. listed for Damp Location.

