



# FORUM

## 6" ROUND



JOB \_\_\_\_\_

TYPE \_\_\_\_\_

**DESCRIPTION:** The **FORUM/ROUND** fixture provides a direct/indirect general illumination where quality lighting is required to meet specific tasks.

**APPLICATIONS:** Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

**MOUNTING HEIGHTS:** The top of the fixture to ceiling should be a minimum of 18" for all fixtures (see mounting sheet for detail information).

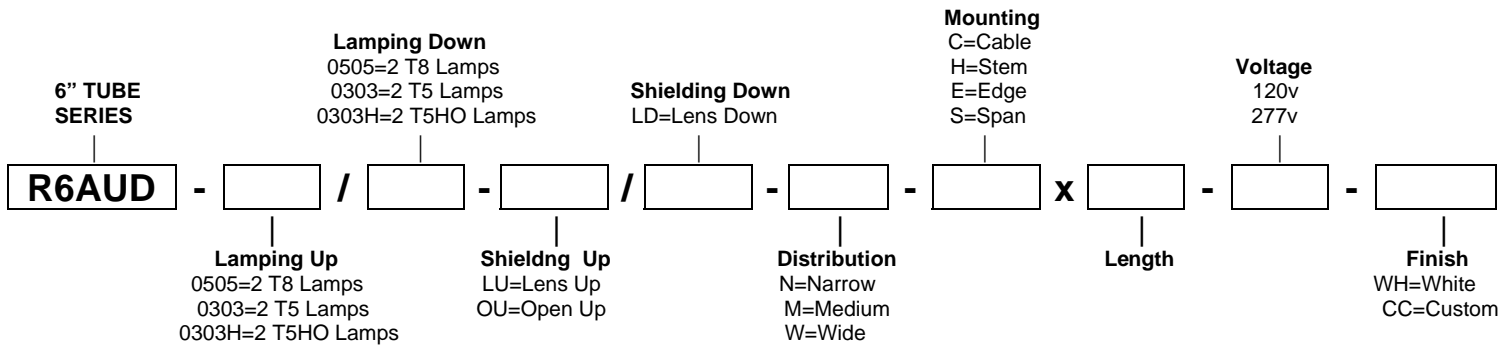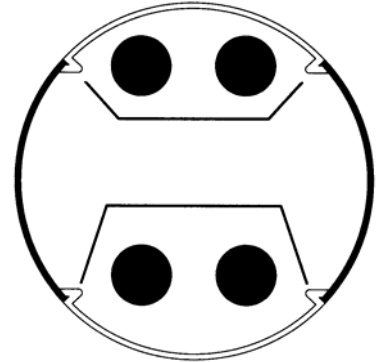

### SPECIFICATION:

The **FORUM/ROUND** housing shall be 6" in diameter constructed of .125" aluminum extrusion 6063-T5 alloy for structural rigidity. Sockets shall be prewired and factory installed. The ends shall be .250" thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized.

**REFLECTOR:** Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

**LENS:** Optional, shall be clear acrylic prismatic with 20% DR for optical control.

**BALLAST:** Ballast shall be energy saving CBM/ETL certified Class P.

**PRODUCT LISTING:** Shall be U.L. listed.