





JOB _____

TYPE _____

DESCRIPTION: The FORUM/ROUND fixture provides direct general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

MOUNTING HEIGHTS: The minimum mounting height above the floor should be 7'-0". For task lighting applications, the minimum distance should be 3'-0". (see mounting sheet for detail information).

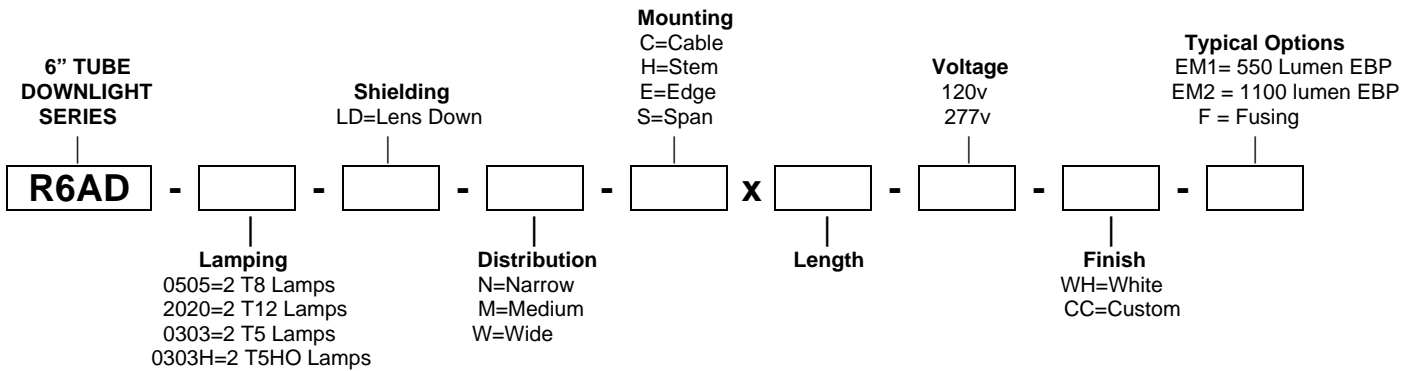

SPECIFICATION:

The FORUM/ROUND housing shall be 6" in diameter constructed of .125" aluminum extrusion 6063-T5 alloy for structural rigidity. Sockets shall be prewired and factory installed. The ends shall be .250" thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized.

REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.


LENS: Shall be clear acrylic prismatic with 20% DR for optical control.

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P.

PRODUCT LIGHTING: Shall be U.L. listed.


CANDLEPOWER SUMMARY

CATALOG NO.: R6AD-0505-L
LAMP TYPE: F32T8/SP35/RS
LUMENS: 2900
FIXTURE EFFICIENCY: 62.3%
LUMINAIRE INPUT WATTS: 69
TEST REPORT NO.: B.A.L. 4943.1



ANGLE CANDELA LUMENS		
180	0	
175	0	0
165	0	0
155	13	1
145	10	2
135	25	10
125	63	23
115	131	56
105	229	107
95	354	177
90	408	
85	464	257
75	542	318
65	650	403
55	736	462
45	789	490
35	892	500
25	971	426
15	1020	284
5	1046	100
0	1028	

CATALOG NO.: R6AD-2020-L
LAMP TYPE: F40T12WW/RS
LUMENS: 3200
FIXTURE EFFICIENCY: 59.7%
LUMINAIRE INPUT WATTS: 84
TEST REPORT NO.: B.A.L. 4945.1



ANGLE CANDELA LUMENS		
180	0	
175	0	0
165	0	0
155	0	0
145	15	4
135	25	11
125	56	22
115	110	50
105	198	100
95	317	173
90	380	
85	444	261
75	559	341
65	685	431
55	777	493
45	838	526
35	950	537
25	1040	460
15	1106	309
5	1138	108
0	1125	