





JOB _____

TYPE _____

DESCRIPTION: The FORUM/ROUND fixture provides an indirect general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

MOUNTING HEIGHTS: The top of the fixture to ceiling should be a minimum of 18" for all fixtures (see mounting sheet for detail information).

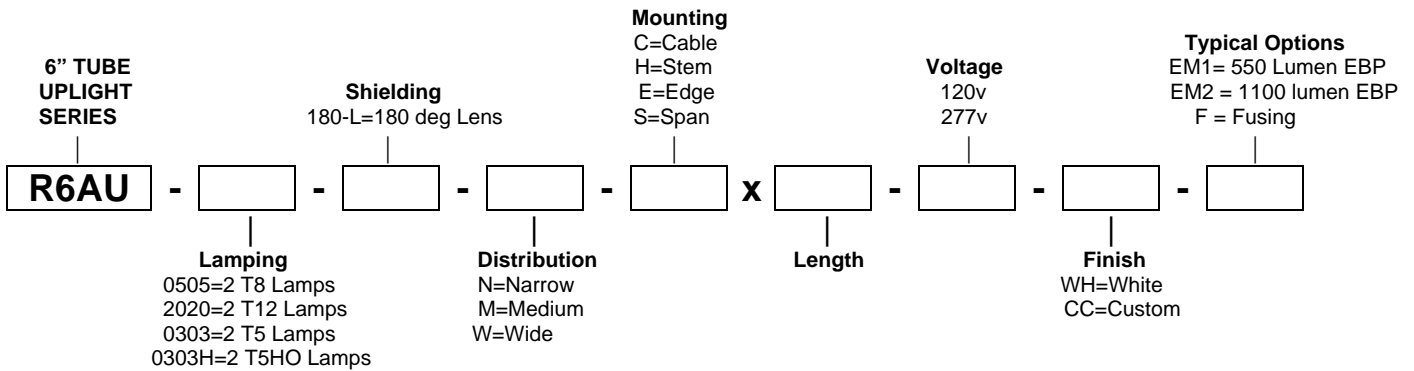

SPECIFICATION:

The FORUM/ROUND housing shall be 6" in diameter constructed of .125" aluminum extrusion 6063-T5 alloy for structural rigidity. Sockets shall be prewired and factory installed. The ends shall be .250" thick aluminum with no visible fasteners. Standard continuous single sections shall be 12 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized.

REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.


LENS: Optional, shall be clear acrylic prismatic with 20% DR for optical control.

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P.

PRODUCT LISTING: Shall be U.L. listed.


CANDLEPOWER SUMMARY

CATALOG NO.: R6AU-0505-180-L
LAMP TYPE: F32T8/SP35/RS
LUMENS: 2900
FIXTURE EFFICIENCY: 66.5%
LUMINAIRE INPUT WATTS: 67
TEST REPORT NO.: B.A.L. 7679.0



ANGLE CANDELA LUMENS		
180	1036	
175	1039	99
165	1004	281
155	967	427
145	954	533
135	875	556
125	741	487
115	647	404
105	534	320
95	420	245
90	384	
85	322	191
75	252	151
65	159	90
55	87	44
45	38	17
35	21	7
25	14	2
15	9	0
5	0	0
0	0	0

CATALOG NO.: R6AU-2020-180-L
LAMP TYPE: F40T12WWW/RS
LUMENS: 3200
FIXTURE EFFICIENCY: 57.2%
LUMINAIRE INPUT WATTS: 79
TEST REPORT NO.: B.A.L. 7680.0



ANGLE CANDELA LUMENS		
180	998	
175	997	95
165	978	271
155	937	411
145	897	505
135	817	517
125	700	456
115	611	382
105	500	304
95	395	231
90	355	
85	300	175
75	239	141
65	159	88
55	100	48
45	56	24
35	29	9
25	14	2
15	4	0
5	0	0
0	0	0