FORUM
6" ROUND

JOB_____

TYPE_____

DESCRIPTION: The **FORUM/ROUND** fixture provides an indirect general illumination where quality lighting is required to meet specific tasks.

APPLICATIONS: Classrooms, Office Areas, Libraries, Lobbies, Retail Stores, Design Centers.

MOUNTING HEIGHTS: The top of the fixture to ceiling should be a minimum of 18" for all fixtures (see mounting sheet for detail information).

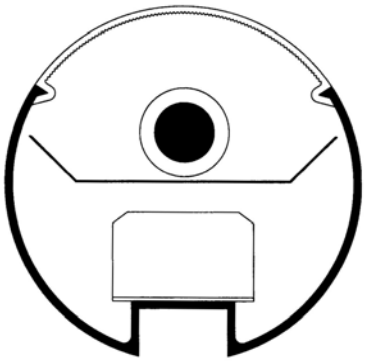

6" TUBE UPLIGHT SERIES		Shielding		Mounting			Voltage		Typical Options
		LU=Lens Up		C=Cable H=Stem E=Edge S=Span			120v 277v		EM1= 550 Lumen EBP EM2 = 1100 lumen EBP F = Fusing
R6AUT	-		-		-		x	-	-	-
	Lamping 05=1 T8 Lamp 10=1 T12 Lamp 03=1 T5 Lamp 03H=1 T5HO Lamp			Distribution N=Narrow M=Medium W=Wide			Length		Finish WH=White CC=Custom	

SPECIFICATION:

The **FORUM/ROUND** housing shall be 6" in diameter constructed of .125" aluminum extrusion 6063-T5 alloy for structural rigidity. Sockets shall be prewired and factory installed. The ends shall be .250" thick aluminum with no visible fasteners. Standard continuous single sections shall be 16 feet. Standard finish shall be white consisting of a high solids baked polyester paint pretreated with a five (5) stage cleaning/conversion coating rust inhibitor. Other painted architectural finishes available as well as satin anodized. This extrusion will accommodate a track lighting system. Consult factory for compatibility.

REFLECTOR: Reflector shall be die formed 22 gauge aluminum with 86% reflectivity.

LENS: Shall be clear acrylic prismatic with 20% DR for optical control.

BALLAST: Ballast shall be energy saving CBM/ETL certified Class P.

PRODUCT LISTING: Shall be U.L. listed.

FORUM Inc. 908 Old Freeport Rd Pittsburgh, PA 15238 Phone (412) 781-5970 Fax (412) 781-5971