




Drum Series

The Drum series by Forum is a line of LED fixtures ranging from 18" through 72" in diameter. Drum can be integrated into any space, vertical and horizontal surfaces, conical cable mounting, as well as single stem configurations. All DRUM fixtures provide even, uniform illumination, center to edge, without fade. Drum is available in Black, White, Silver, and custom colors and features a premium design, fit and finish.

Ordering

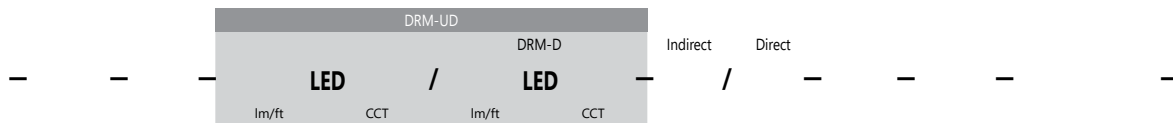

DISTRIBUTION	SIZE	MOUNTING	OUTPUT		SHIELDING	VOLTAGE	FINISH	OPTION 1	OPTION 2
DRM-D Direct	18 18" OD	S Surface	SO Standard Output	27 2700k temp 93.5%	WOL White Opal Lens	120V	WH White	EMLED LED battery pk	SW Separate Switch
DRM-UD Direct/Indirect	24 24" OD	CC Conical Cable*	HO High Output	Special order option	CFA Clear Frosted Acrylic* <small>* Available in indirect only</small>	277V	SV Silver	EC Emergency Circuit	90 CRI 90 CRI
	36 36" OD		H Stem*	SG Soft Glow indirect only					
	48 48" OD	* Specify Stem/ Cable Length	Custom Output Specify desired output	35 3500k temp 96.8%					
				40 4000k temp 100%					
				50 5000k temp 103%					
72 72" OD		Im/fixture							

- 1 60 option available with 40 Fixture Length only
- 2 90 option available with 60 Fixture Length only
- 3 A2 option available with 80 Fixture Length only

- 4 10ft aircraft cables with gripples and hourglass sleeves pre-installed. Canopy kits ordered separately
- 5 G2 option available with 60 Fixture Length and 90 Lumen Output options only

- 6 10ft Power Cord included. 300V 18AWG, 5-Conductor wire
- 7 Powercord not required for G2 mounting option



Drum Series



Customer Name	Date
Project Name	
Catalog Number	

CONTROLS & SENSORS

Ordering Code	Description

DIMMING OPTIONS

Ordering Code	Description
D10V	0-10V Dimming, 1% power class
DLA2	Lutron Hi-lume 1% 2-1ire LED driver (120V forward phase only)
DLEH5	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DLE55	Lutron 5-Series EcoSystem LED driver
DALI	Digitally Addressable Lighting Interface
DIM	Custom Dimming. Please specify dimming manufacturer/model

LUMEN MULTIPLICATION TABLE

Ordering Code	Description

MOUNTING




CC
Conical Cable Mount



H
Stem Mount

OVERVIEW DRAWING



LUMENS PER FIXTURE

DRUM	STANDARD OUTPUT	HIGH OUTPUT
18	1687 lm	5061 lm
24	3000 lm	9000 lm
36	6750 lm	20250 lm
48	12000 lm	36000 lm
72	27000 lm	81000 lm



Drum Series



Customer Name	Date
Project Name	
Catalog Number	

CONSTRUCTION

Housing:	18 gauge spun cold rolled steel housing
Lens:	White opal, and clear frosted acrylic lenses.
Optical Assembly:	
Paint:	Black, White, Silver, Custom Color
Weight:	

OPTICAL SYSTEM

Lumens:	
Distribution:	Direct (D), Direct/Indirect (UD)
Efficacy:	
Wattage:	
CCT:	2700k, 3000K, 3500K, 4000K, 5000K
CRI (Min):	90CRI
R9 (Min):	
Color Consistency:	
Luminance Uniformity:	

ELECTRICAL

Input Voltage:	120V, 277V, Universal Voltage
Input Frequency:	50/60Hz
Power Factor (PF):	
Total Harmonic Distortion (THD):	
Thermal Protection:	
Temperature / Humidity:	
Transient Protection:	
Electronic Vibration Testing:	

CONTROLS

Dimming:	0-10V 1% power class; Lutron Hi-lume 1% 2-wire LED driver; Lutron Hi-lume 1% EcoSystem LED driver with soft-On Fade-to-Black; Lutron 5-Series EcoSystem LED driver; Digitally Addressable Lighting Interface; Custom Dimming
-----------------	--

AMBIENT TEMPERATURE

Product ID	Operating Temperature
LEL:	

LUMEN MAINTENANCE

Projected L85 per IES TM-21 at max 35°C

50,000 HR

MOUNTING

- S - Surface
- CC - Conical Cable
- H - Stem



For Product or Technical Questions:

E: INFO@FORUMLIGHTING.COM
T: +1 412 781 5970



forumlighting.com | gecurrent.com

© 2021 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
IND727 | (Rev 11/30/21)