

Hydro Harsh Environments



Hydro Series
demanding/wet rated luminaire



Hydro






Versatile and Capable

Hydro brings provides premium performance in a versatile package. Fully adjustable mounting brackets and optional cantilevered wall arms make mounting Hydro a breeze in any space. LED output can be specified from 150-1300 lumens/ft in static white, Tunable White or RGBW. Available in a variety of beam angles, Hydro is one of Forum's most versatile luminaires; ready to take on whatever your design challenges may be.

Explore the System

Hydro's IP66 rating enables this luminaire to shine in some of the harshest environments where architectural lighting is needed. Whether the application demands area lighting, flood lighting, wall washing, wall grazing, or façade lighting - Hydro is up to the challenge. Clean styling and hidden fasteners make Hydro an appealing addition to any space where the luminaire housing is used to augment the architectural aesthetic. The 2-3/8" x <4" profile is available in 2', 3', or 4' lengths, easily tucks away behind adjacent architectural details for applications that require the luminaire be hidden from view.

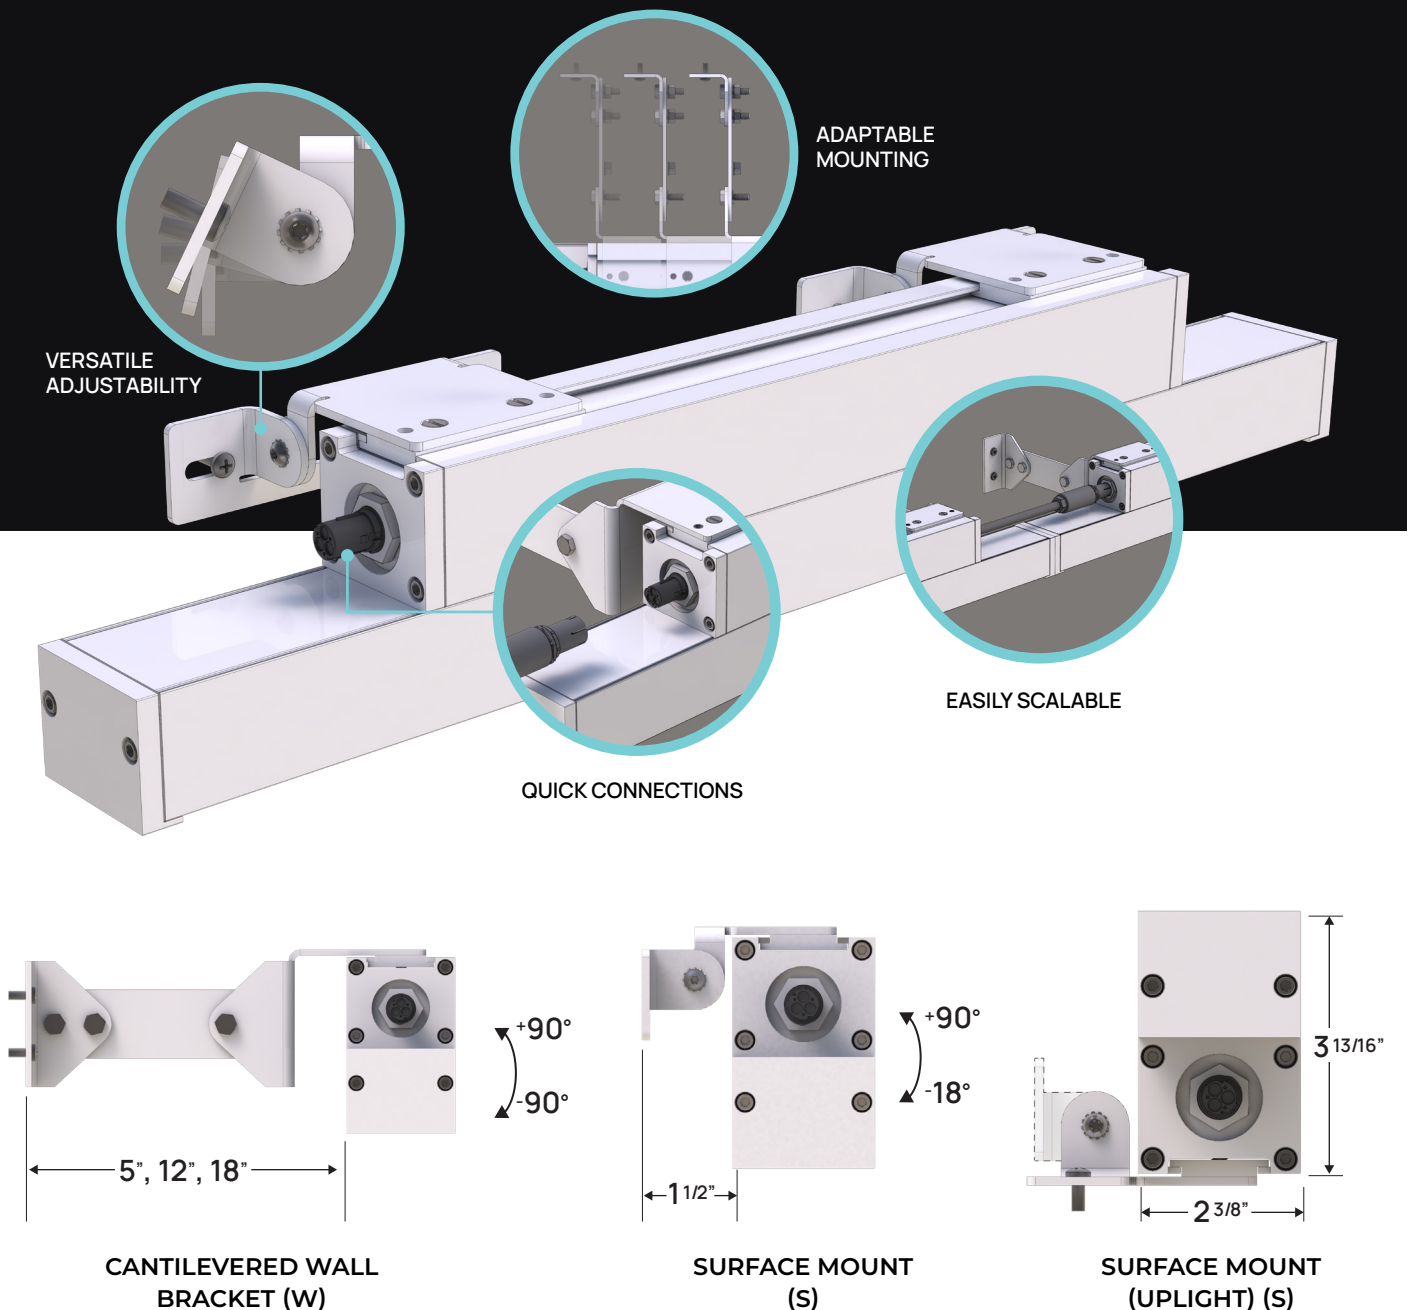



For Product or Technical Questions:

T: 412-781-5970

E: info@forumlighting.com

GE current
a Daintree company

© 2021 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license.

Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. IND705 | (11/17/2021)