

# Forecast Series

3, 4, 6

The Forecast series by Forum is a line of continuously illuminated recessed luminaires. Forecast's unique hybrid construction features a sheet metal housing with aluminum trim, reducing fixture weight and cost without sacrificing premium fit and finish. Available in 2", 4" and 5 1/2" apertures with various grid and hard ceiling configurations.

## Ordering

		LED																	
		lm/ft	CCT																
DISTRIBUTION	PROFILE	OUTPUT		SHIELDING	LENGTH	VOLTAGE	FINISH	OPTION 1	OPTION 2	OPTION 3	OPTION 4								
<b>SRT-43</b> 2 1/2" width	<b>FG</b> 9/16" grid	<b>65</b> 650 lm/ft 6.5 input watts/ft*	<b>27</b> 2700k temp 93.5% Special order option	<b>SAT</b> Satin Lens	<b>2</b> 2'	<b>120V</b>	<b>WH</b> White	<b>MR</b> 37W MAX MR Module	<b>EMLED</b> LED battery pk	<b>EC</b> Emergency Circuit									
	<b>TG</b> 15/16" grid			<b>WOL</b> White Opal Lens	<b>3</b> 3'	<b>277V</b>	<b>SV</b> Silver	<b>CP</b> Chicago Plenum	<b>SW</b> Separate Switch	<b>F</b> Fusing									
<b>SRT-44</b> 4" width	<b>BG</b> slot grid	<b>95</b> 950 lm/ft 9.5 input watts/ft*	<b>30</b> 3000k temp 95.2%	<b>WOP</b> White Opal over Parabolic Baffle	<b>4</b> 4'	<b>UNV</b> Universal	<b>BK</b> Black	<b>90 CRI</b> 90 CRI	<b>ADJ</b> Adjustable	<b>DL</b> Damp Location									
	<b>F</b> 1/2" flange			<b>SAP</b> Satin Lens over Parabolic Baffle	<b>5</b> 5'		<b>CC</b> Custom Color  Provide custom color RAL#:	<b>DIMMING OPTIONS (CHOOSE 1)</b>											
<b>SRT-46</b> 6" width	<b>FF</b> flange-free sheetrock	* Assumes 4000k w/ satin lens  <b>Lumen Multiplier = % of 4000K</b>  Consult factory for limitations	<b>35</b> 3500k temp <b>96.8%</b>		<b>6</b> 6'			<b>D10V</b> 0-10V dimming 1% power class	<b>DLA2</b> Lutron Hi-lume 1% 2-wire LED driver (120V forward phase only)	<b>DLA3</b> Lutron Hi-lume 1% 3-wire LED driver									
			<b>40</b> 4000k temp <b>100%</b>		<b>7</b> 7'			<b>DLEH5</b> Lutron Hi-lume 1%-H EcoSystem LED driver with soft-On, Fade-to-Black	<b>DLE55</b> Lutron 5-Series EcoSystem LED driver	<b>DLE55</b> Lutron 5-Series EcoSystem LED driver									
				<b>50</b> 5000k temp <b>103%</b>				<b>8</b> 8'											
		Custom Output			<b>PTRN</b> custom pattern*														
		<b>LED</b> lm/ft CCT  <b>SRT-43</b> : 430-980 lm/ft <b>SRT-44</b> : 460-1610 lm/ft <b>SRT-46</b> : 490-1710 lm/ft			Specify continuous run length:														
					Standard run length in even foot increments.														
					Units ordered as individual units cannot be joined in field to create runs.														
					* See pattern worksheet														

- 60 option available with 40 Fixture Length only
- 90 option available with 60 Fixture Length only
- A2 option available with 80 Fixture Length only

- 10ft aircraft cables with gripples and hourglass sleeves pre-installed. Canopy kits ordered separately
- G2 option available with 60 Fixture Length and 90 Lumen Output options only

- 10ft Power Cord included. 300V 18AWG, 5-Conductor wire
- Powercord not required for G2 mounting option



# Forecast Series

3, 4, 6

Customer Name	Date
Project Name	
Catalog Number	


## CONTROLS & SENSORS

Ordering Code	Description
OCC	Wattstopper occupancy sensor
DPS	Wattstopper daylight photo sensor
LVS	Lutron Vive integrated fixture sensor (occ+daylight)
LVR	Lutron Vive integrated fixture sensor (radio only)
ELM	Enlighted micro sensor
OES	Osram SensiLUM
OEC	Osram Encelium CLM
OED	Osram CLM DEXAL
C110	Casambi (1x 010v)
C210	Casambi (2x 010v)
CRGBW	Casambi (RGBW)

## DIMMING OPTIONS

Ordering Code	Description
D10V	0-10V Dimming, 1% power class
DLA2	Lutron Hi-lume 1% 2-lire LED driver (120V forward phase only)
DLA3	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DLA5	Lutron Hi-lume 1% EcoSystem LED driver
DLEH5	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DLE55	Lutron 5-Series EcoSystem LED driver
DALI	Digitally Addressable Lighting Interface
DIM	Custom Dimming. Please specify dimming manufacturer/model

## 2. OPTIONAL ACCESSORIES



x  
Quantity

90° HORIZONTAL CORNER



x  
Quantity

90° OUTSIDE TRANSITION  
wall to ceiling or multiple planes



x  
Quantity

90° INSIDE TRANSITION  
wall to ceiling or multiple planes






## Drawings

3" W




4" W

6" W




**FG**  
9/16" Grid

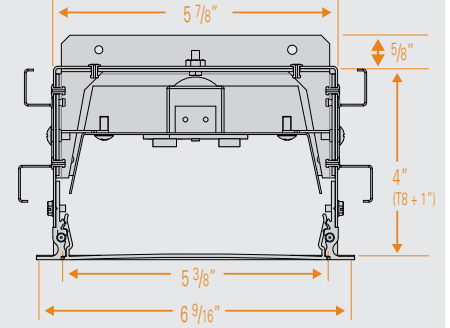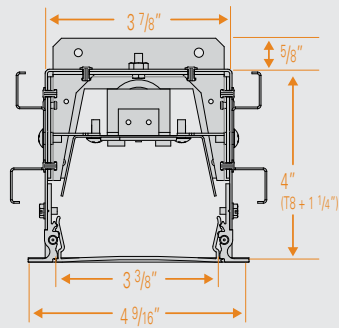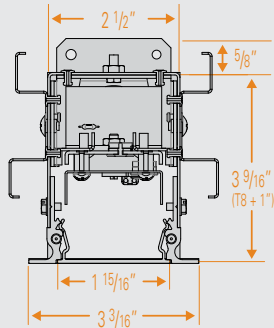




**TG**  
15/16" Grid

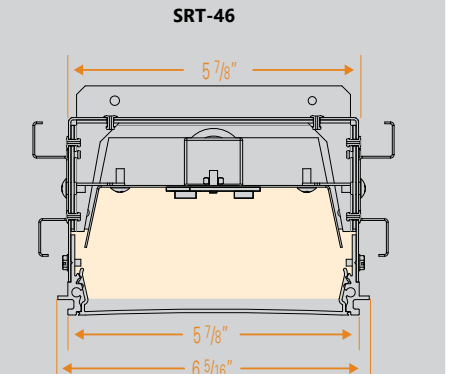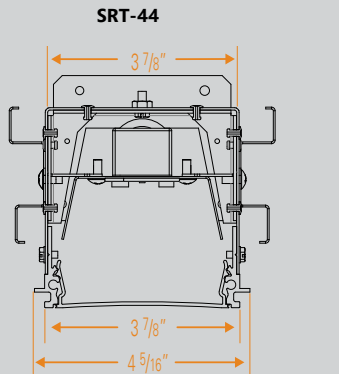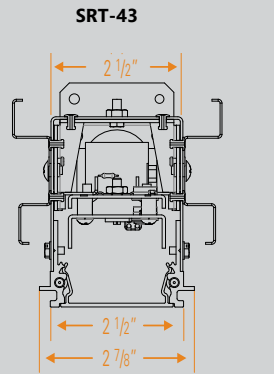

**BG**  
(Bolt Slot Grid)

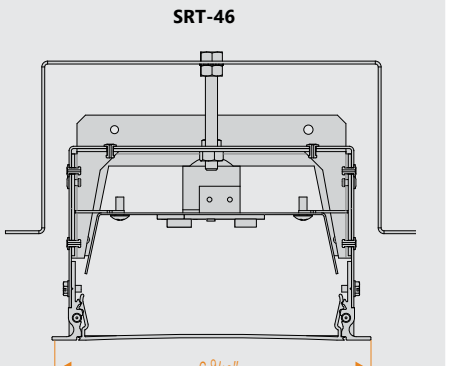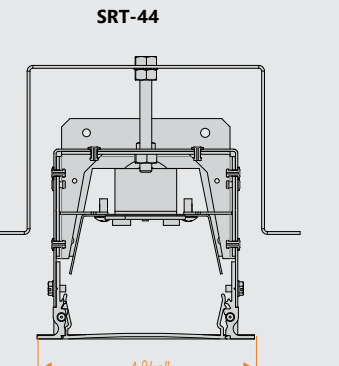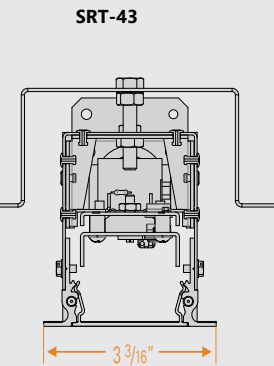

**F**  
(1/2" Overlap Flange)

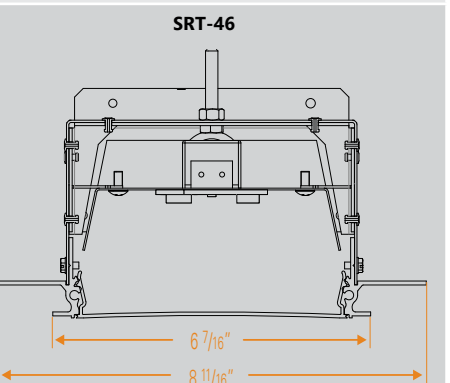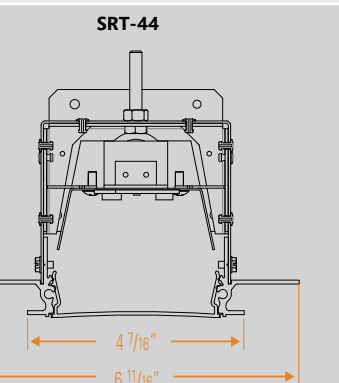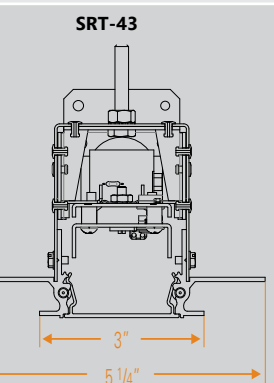

**FF**  
(Flange-Free)




Customer Name	Date
Project Name	
Catalog Number	

## PATTERN WORKSHEET


Please use this worksheet to specify your continuous run SRT or SRZ patterns. Please use the next page for all PER patterns.

### Horizontal Corners

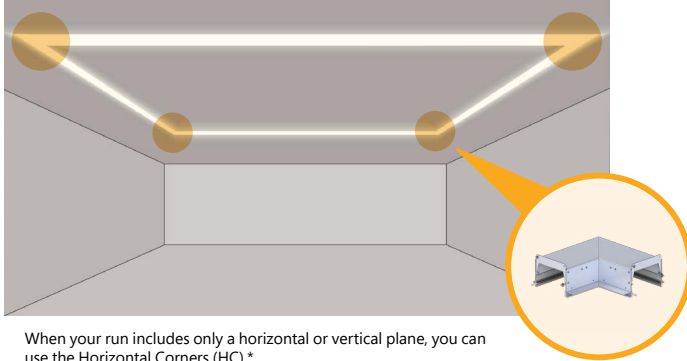


When your run includes only a horizontal or vertical plane, you can use the Horizontal Corners (HC).\*

### Multi-plane Transition Corners

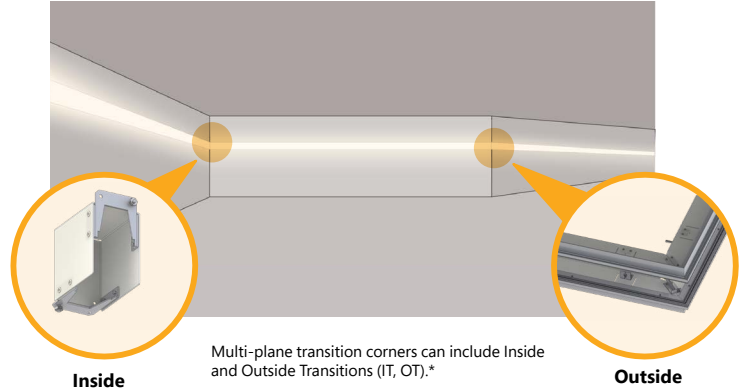


Multi-plane transition corners can include Inside and Outside Transitions (IT, OT).\*

### Wall-to-Ceiling Transitions Corners

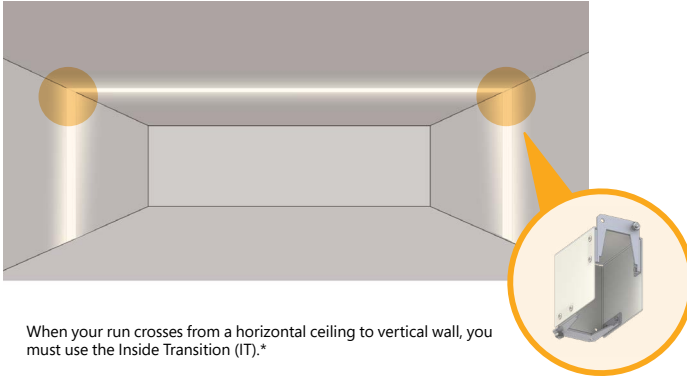

When your run crosses from a horizontal ceiling to vertical wall, you must use the Inside Transition (IT).\*


### Example Pattern

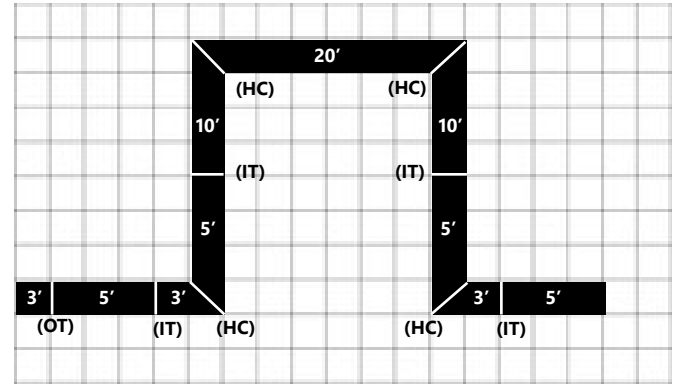

OT = 1 HC = 4 IT = 4 Linear Run = 69'

\* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

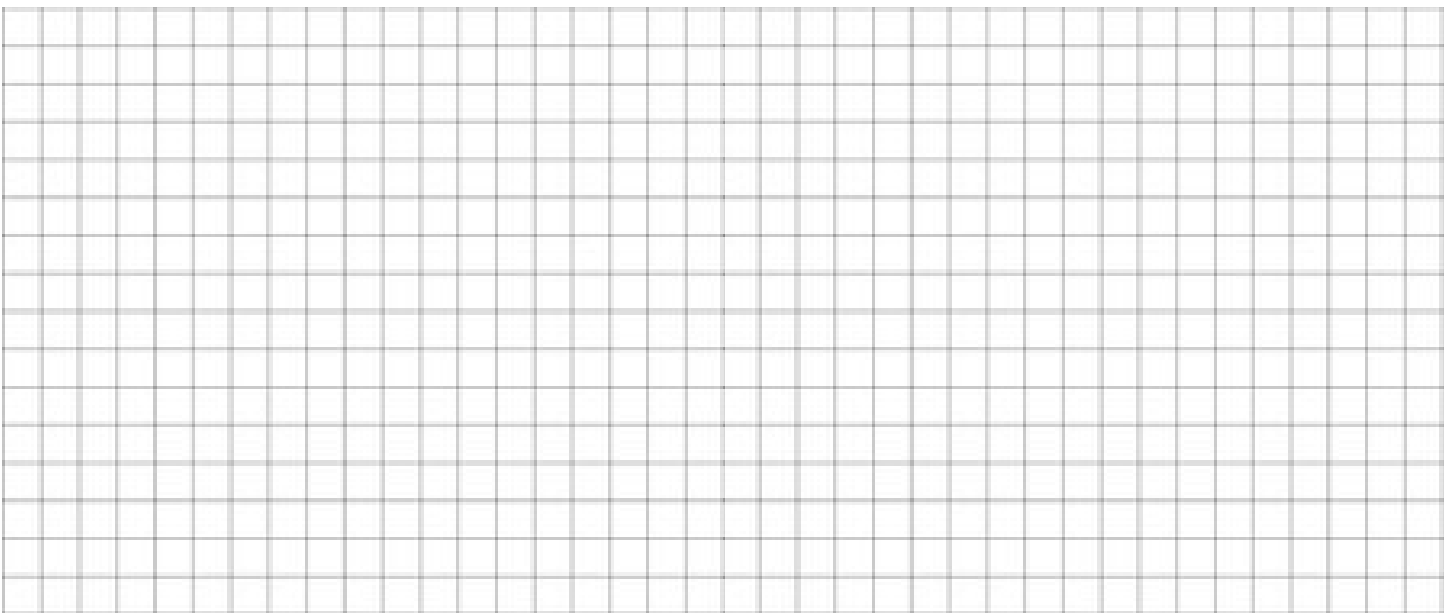

OT = HC = IT = Linear Run =

\* 90 degree standard



Please use this worksheet to specify all PER patterns. Please use the previous page for your continuous run SRT or SRZ patterns.

Perimeter corners can include  
Inside and Outside (IC, OC).\*

## Inside

## Outside

A diagram of a square frame on a grid. The top horizontal member is labeled 20'. The left vertical member is labeled 15'. The right vertical member is labeled 15'. The bottom horizontal member is labeled 15'. The corners are labeled (iC) at the top-left and top-right, and (OC) at the bottom-left and bottom-right. The frame is drawn with thick black lines.

OC = 2    IC = 2    Linear Run = 80'

\* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

A full-page sheet of white graph paper with a light gray grid. The grid consists of small squares, approximately 10 units wide by 10 units high. There are no margins or other markings on the page.

OT =            HC =            IT =            Linear Run =


\* 90 degree standard




Customer Name	Date
Project Name	
Catalog Number	

## CORNER OPTIONS


### Horizontal Corners

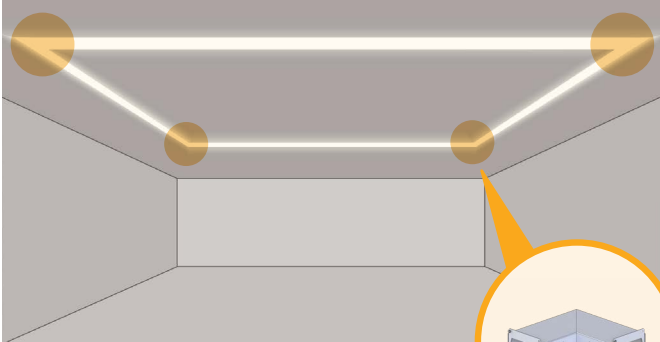

When your run includes only a horizontal or vertical plane, you can use the Horizontal Corners (HC).\*




### Wall-to-Ceiling Transitions Corners

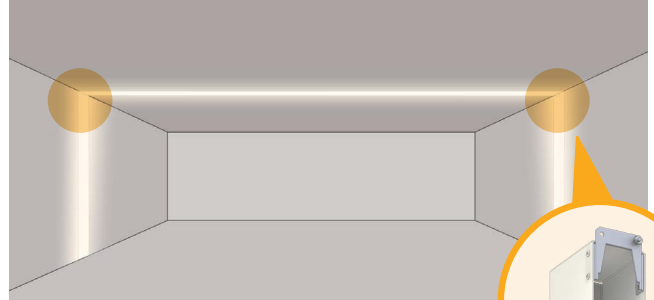

When your run crosses from a horizontal ceiling to vertical wall, you must use the Inside Transition (IT).\*



### Multi-plane Transition Corners

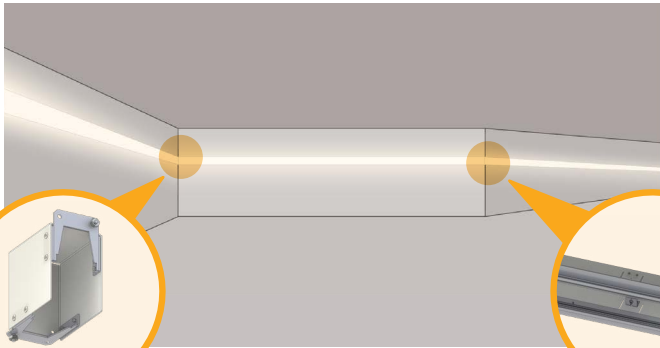


Multi-plane transition corners can include Inside and Outside Transitions (IT, OT).\*

Inside

Outside

### Perimeter Corners

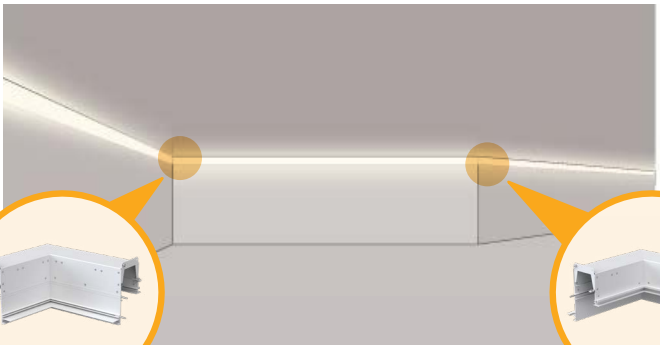

Perimeter corners can include Inside and Outside (IC, OC).\*

Inside

Outside

\* 90 degree standard




Customer Name	Date
Project Name	
Catalog Number	

## CEILING GRID

Use the guide below to determine the proper ceiling grid placement for installation of the FG/TG and BG profiles.


**SRT, SRT REC, SRT ASY  
FG/TG**

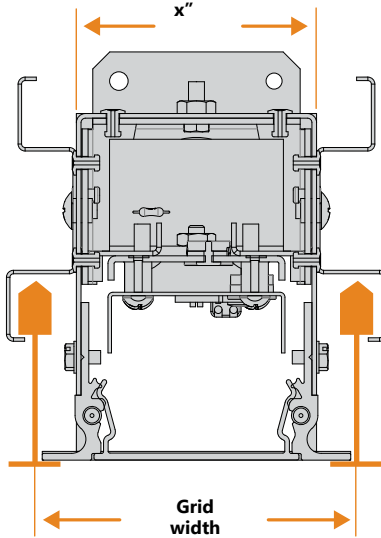

$$\text{Grid width} = x'' + 7/8''$$

Use the width (x) provided in the charts on pages 5–7 of this document, and add 7/8".


**SRT, SRT REC, SRT ASY  
BG**

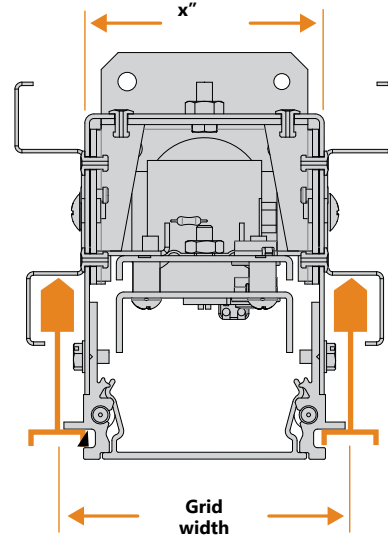

$$\text{Grid width} = x'' + 5/8''$$


Use the width (x) provided in the charts on pages 5–7 of this document, and add 5/8".

**SRZ, SRZ ASY, SRZ REC  
FG/TG**

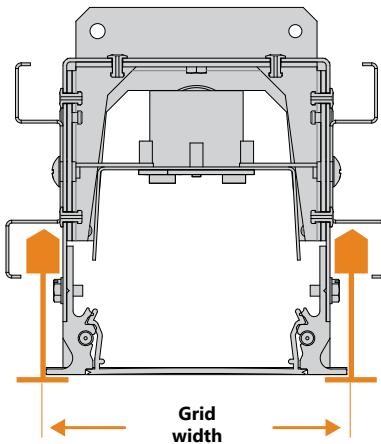

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:  
SRZ-44 ceiling grid width: = 4"  
SRZ-46 ceiling grid width: = 6"

**SRZ, SRZ ASY, SRZ REC  
BG**

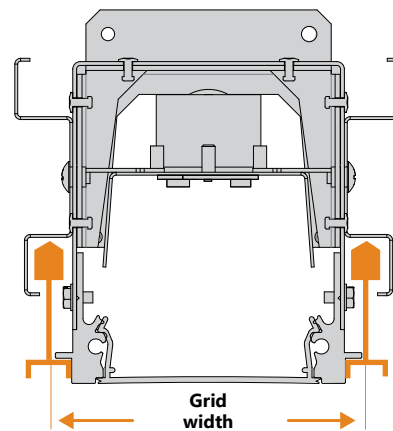

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:  
SRZ-44 ceiling grid width: = 4"  
SRZ-46 ceiling grid width: = 6"




Customer Name	Date
Project Name	
Catalog Number	

## ENVIRONMENT INTERFACE SPECS


Each Forecast (SRT) series fixture is designed for a specific mounting application. Optical assembly, wiring, and continuous run assembly is universal across the family of fixture profiles. For more information, please consult complete Installation Instructions, available online.

### FF (Flange-free) installation

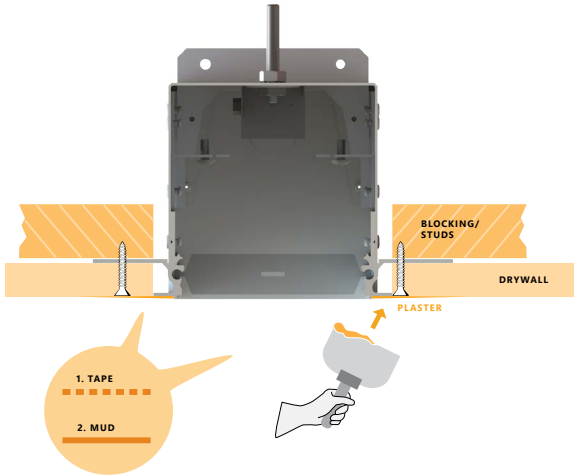



The FF (Flange-Free) fixture is installed prior to drywall installation.

### F (1/2" Overlap) installation

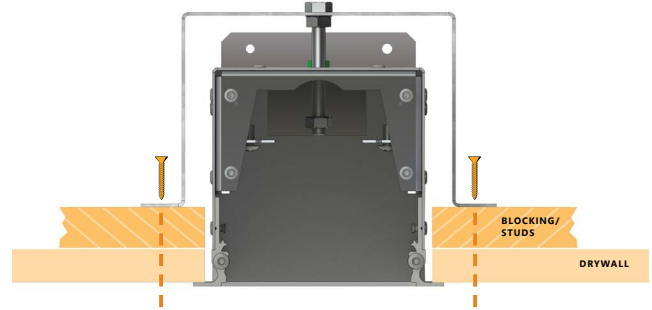

The F (1/2" Overlap) fixture is installed after drywall installation.

### Fg/BG/TG Grid installation

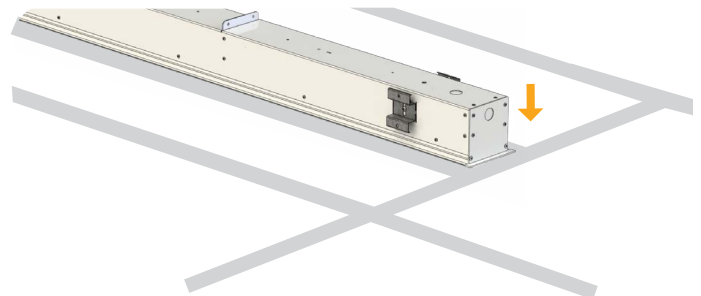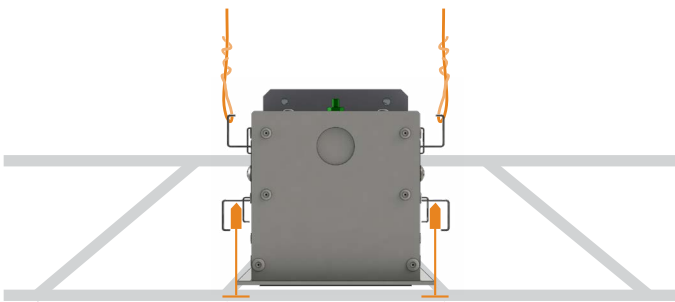


The FG/TG/BG fixture is installed within a ceiling grid system.







## Components and Assembly

### JOINING HARDWARE

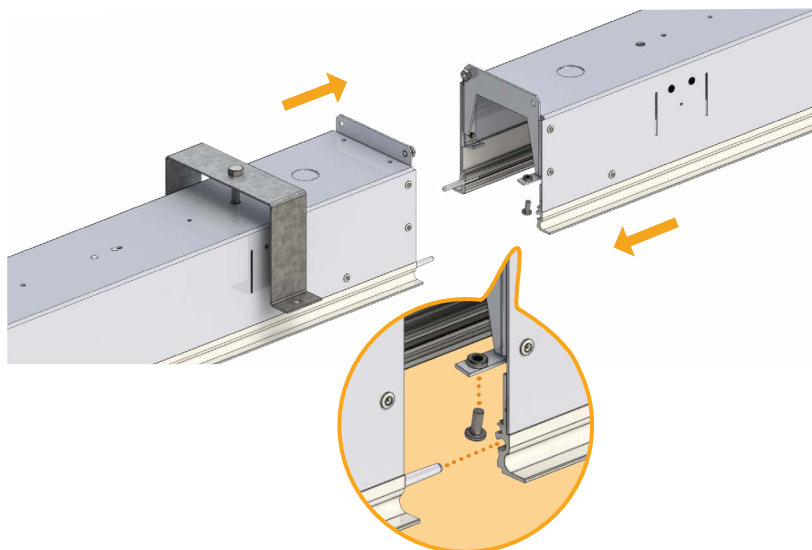


Alignment pins engage the housing profile of the adjoining units. Gasket strips along the exposed faces ensure a true fit and prevent light leak.

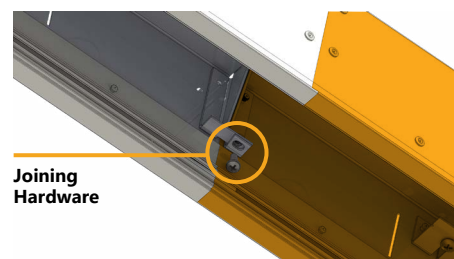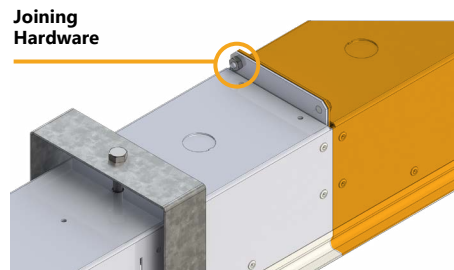

Supplied hardware draws the pieces together tightly.


### LENS DETAIL

#### Snap-in Method

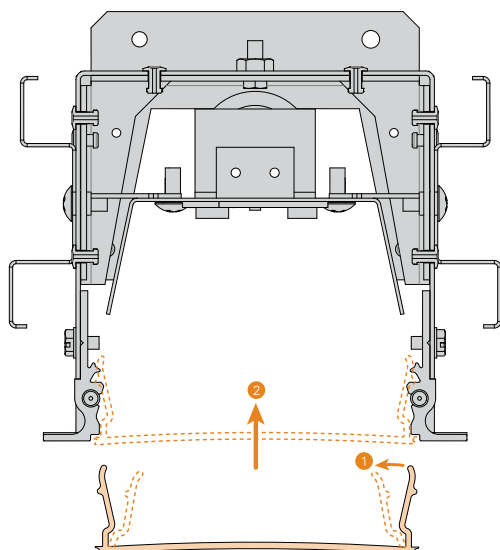

For Snap-in Lenses, gently squeeze the sides (1) while lifting into place (2). Lens will snap into position.

#### Lift-and-Shift Method

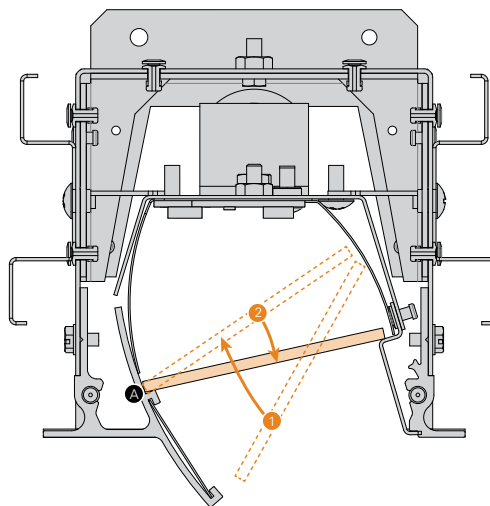

For Lift-and-Shift Lenses (used on Regressed, Perimeter, and Asymmetrical fixtures), lift lens into housing (1), rest on point A, then lower into place (2).



# Forecast Series

3, 4, 6

Customer Name

Date

Project Name

Catalog Number


## Photometrics

### Logic/Config

#### Forecast 3

2652 Lumens

SRT-43PER-TG-65LED40-SAT X 4'-WH



Maximum Candela = 946.13 Located At Horizontal Angle = 45, Vertical Angle = 5  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Vertical Plane Through Horizontal Angles (45 - 225)  
# 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	440.72	16.60
0-30	870.77	32.80
0-40	1318.13	49.70
0-60	2083.37	78.60
0-80	2545.69	96.00
0-90	2651.58	100.00


ZONE	LUMENS	% OF FIXTURE
10-90	2532.24	95.50
20-40	877.41	33.10
20-50	1290.01	48.70
40-70	1040.66	39.20
60-80	462.31	17.40
70-80	186.90	7.00
80-90	105.89	4.00
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2651.58	100.00

### Logic/Config

#### Forecast 4

3817 Lumens

SRT-44-TG-95LED40-WOL X 4'-WH



Maximum Candela = 1353.04 Located At Horizontal Angle = 0, Vertical Angle = 0  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Vertical Plane Through Horizontal Angles (45 - 225)  
# 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	487.35	12.80
0-30	1030.62	27.00
0-40	1682.22	44.10
0-60	2978.84	78.00
0-80	3731.73	97.80
0-90	3816.93	100.00


ZONE	LUMENS	% OF FIXTURE
10-90	3689.8	96.70
20-40	1194.87	31.30
20-50	1873.1	49.10
40-70	1773.03	46.50
60-80	752.88	19.70
70-80	276.48	7.20
80-90	85.20	2.20
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	3816.93	100.00

### Logic/Config

#### Forecast 6

2670 Lumens

SRT-46-TG-65LED40-SAT X 4'-WH



Maximum Candela = 1041.21 Located At Horizontal Angle = 0, Vertical Angle = 5  
# 1 - Vertical Plane Through Horizontal Angles (0 - 180)  
# 2 - Vertical Plane Through Horizontal Angles (45 - 225)  
# 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	370.13	13.90
0-30	776.58	29.10
0-40	1253.7	46.90
0-60	2142.65	80.20
0-80	2617.27	98.00
0-90	2670.35	100.00

ZONE	LUMENS	% OF FIXTURE
10-90	2573.00	96.40
20-40	883.58	33.10
20-50	1360.02	50.90
40-70	1192.51	44.70
60-80	474.62	17.80
70-80	171.06	6.40
80-90	53.07	2.00
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2670.35	100.00



# Forecast Series

3, 4, 6

Customer Name	Date
Project Name	
Catalog Number	

## CONSTRUCTION

<b>Housing:</b>	Extruded aluminum, machined endcaps
<b>Lens:</b>	Satin frosted, and white opal lenses. Aluminum parabolic baffles in a variety of finishes.
<b>Optical Assembly:</b>	.040" aluminum in a pre-paint white finish. Fully wired unit remains completely accessible from below via ballast panel.
<b>Paint:</b>	Black, White, Silver, Custom Color

## OPTICAL SYSTEM

<b>Lumens:</b>	430-1710 lm/ft
<b>Distribution:</b>	Direct
<b>Efficacy:</b>	Up to 117 LPW
<b>Wattage:</b>	6.5 - 9.5 watts/ft
<b>CCT:</b>	2700k, 3000K, 3500K, 4000K, 5000K
<b>CRI (Min):</b>	90CRI
<b>R9 (Min):</b>	65
<b>Color Consistency:</b>	2SDCM

## ELECTRICAL

<b>Input Voltage:</b>	120V, 277V, Universal Voltage
<b>Input Frequency:</b>	50/60Hz
<b>Power Factor (PF):</b>	>0.9
<b>Total Harmonic Distortion (THD):</b>	<16% - 120V <20% - 277V
<b>Thermal Protection:</b>	Type IC Inherently Protected
<b>Temperature / Humidity:</b>	Suitable for Damp Locations
<b>Transient Protection:</b>	All Non-Lutron = 2.5KV Lutron = 4KV

## CONTROLS

<b>Dimming:</b>	0-10V 1% power class; Lutron Hi-lume 1% 2-wire LED driver; Lutron Hi-lume 1% 3-wire LED driver; Lutron Hi-lume 1% EcoSystem LED driver; Lutron Hi-lume 1%-H EcoSystem LED driver with soft-On Fade-to-Black; Lutron 5-Series EcoSystem LED driver; Digitally Addressable Lighting Interface; Custom Dimming
-----------------	---

## OPERATING TEMPERATURE

Product	Operating Temperature
<b>STD (Non-EM) Options</b>	-30-25°C (-22-77°F)
<b>3/4/6in w/Battery</b>	0-25°C (32-77°F)

## LUMEN MAINTENANCE

- L70>50K Hours

## MOUNTING

- Recessed
- Hard Ceiling
- Flange-free Sheetrock
- Multiple Tegular Grid Ceiling Options (see pg 7)

## DESIGN LIFE & WARRANTY

- Warranty:**
- LED boards - 5 years
  - LED drivers (standard) - 5 years
  - LED drivers (Lutron) - 3 years



For Product or Technical Questions:

E: INFO@FORUMLIGHTING.COM  
T: +1 412 781 5970