



Customer Name	Date
Project Name	
Catalog Number	

Forecast Series

3, 4, 6 Regressed Lens

The Forecast series by Forum is a line of continuously illuminated recessed luminaires. Forecast's unique hybrid construction features a sheet metal housing with aluminum trim, reducing fixture weight and cost without sacrificing premium fit and finish. Available with a 1" regressed lens in 1 1/2", 3" and 5" apertures and various grid and hard ceiling configurations. Current's patented TriGain® phosphor delivers 90 CRI color quality at 80 CRI efficacy.

Ordering

		LED									
		lm/ft	CCT								
DISTRIBUTION	PROFILE	OUTPUT		SHIELDING	LENGTH	VOLTAGE	FINISH	OPTION 1	OPTION 2	OPTION 3	OPTION 4
SRT-43REC 2 1/2" width	FG 9/16" grid	65	27	SAT Satin Lens	2 2'	120V	WH White	MR 37W MAX MR Module	EMLED LED battery pk	EC Emergency Circuit	
		650 lm/ft 6.5 input watts/ft*	2700k temp 93.5% Special order option		3 3'						
SRT-44REC 4" width	TG 15/16" grid	95	30	WOL White Opal Lens	4 4'	UNV Universal	BK Black	90 CRI 90 CRI	ADJ Adjustable	DL Damp Location	
	BG slot grid				950 lm/ft 9.5 input watts/ft*						
SRT-46REC 6" width	F 1/2" flange	* Assumes 4000k w/ satin lens Lumen Multiplier = % of 4000K Consult factory for limitations	35		6 6'						
	FF flange-free sheetrock				3500k temp 96.8%						
			40		8 8'						
			50		PTRN custom pattern*						
					Specify continuous run length:						
					Standard run length in even foot increments.						
					Units ordered as individual units cannot be joined in field to create runs.						
					* See pattern worksheet						
		Custom Output									
		LED									
		lm/ft	CCT								
		SRT-43REC : 430-980 lm/ft									
		SRT-44REC : 460-1610 lm/ft									
		SRT-46REC : 490-1710 lm/ft									

- 1 60 option available with 40 Fixture Length only
- 2 90 option available with 60 Fixture Length only
- 3 A2 option available with 80 Fixture Length only
- 4 10ft aircraft cables with grippers and hourglass sleeves pre-installed. Canopy kits ordered separately
- 5 G2 option available with 60 Fixture Length and 90 Lumen Output options only
- 6 10ft Power cord included. 300V 18AWG, 5-Conductor wire
- 7 Power cord not required for G2 mounting option



Forecast Series

3, 4, 6 Regressed Lens

Customer Name	Date
Project Name	
Catalog Number	


CONTROLS & SENSORS

Ordering Code	Description
OCC	Wattstopper occupancy sensor
DPS	Wattstopper daylight photo sensor
LVS	Lutron Vive integrated fixture sensor (occ+daylight)
LVR	Lutron Vive integrated fixture sensor (radio only)
ELM	Enlighted micro sensor
OES	Osram SensiLUM
OEC	Osram Encelium CLM
OED	Osram CLM DEXAL
C110	Casambi (1x 010v)
C210	Casambi (2x 010v)
CRGBW	Casambi (RGBW)

DIMMING OPTIONS

Ordering Code	Description
D10V	0-10V Dimming, 1% power class
DLA2	Lutron Hi-lume 1% 2-1ire LED driver (120V forward phase only)
DLA3	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DLA5	Lutron Hi-lume 1% EcoSystem LED driver
DLEH5	Lutron Hi-lume 1% H EcoSystem LED driver with soft-On, Fade-to-Black
DALI	Digitally Addressable Lighting Interface
DIM	Custom Dimming. Please specify dimming manufacturer/model

2. OPTIONAL ACCESSORIES




90° HORIZONTAL CORNER

* Consult factory for additional corner options



Customer Name	Date
Project Name	
Catalog Number	

Drawings

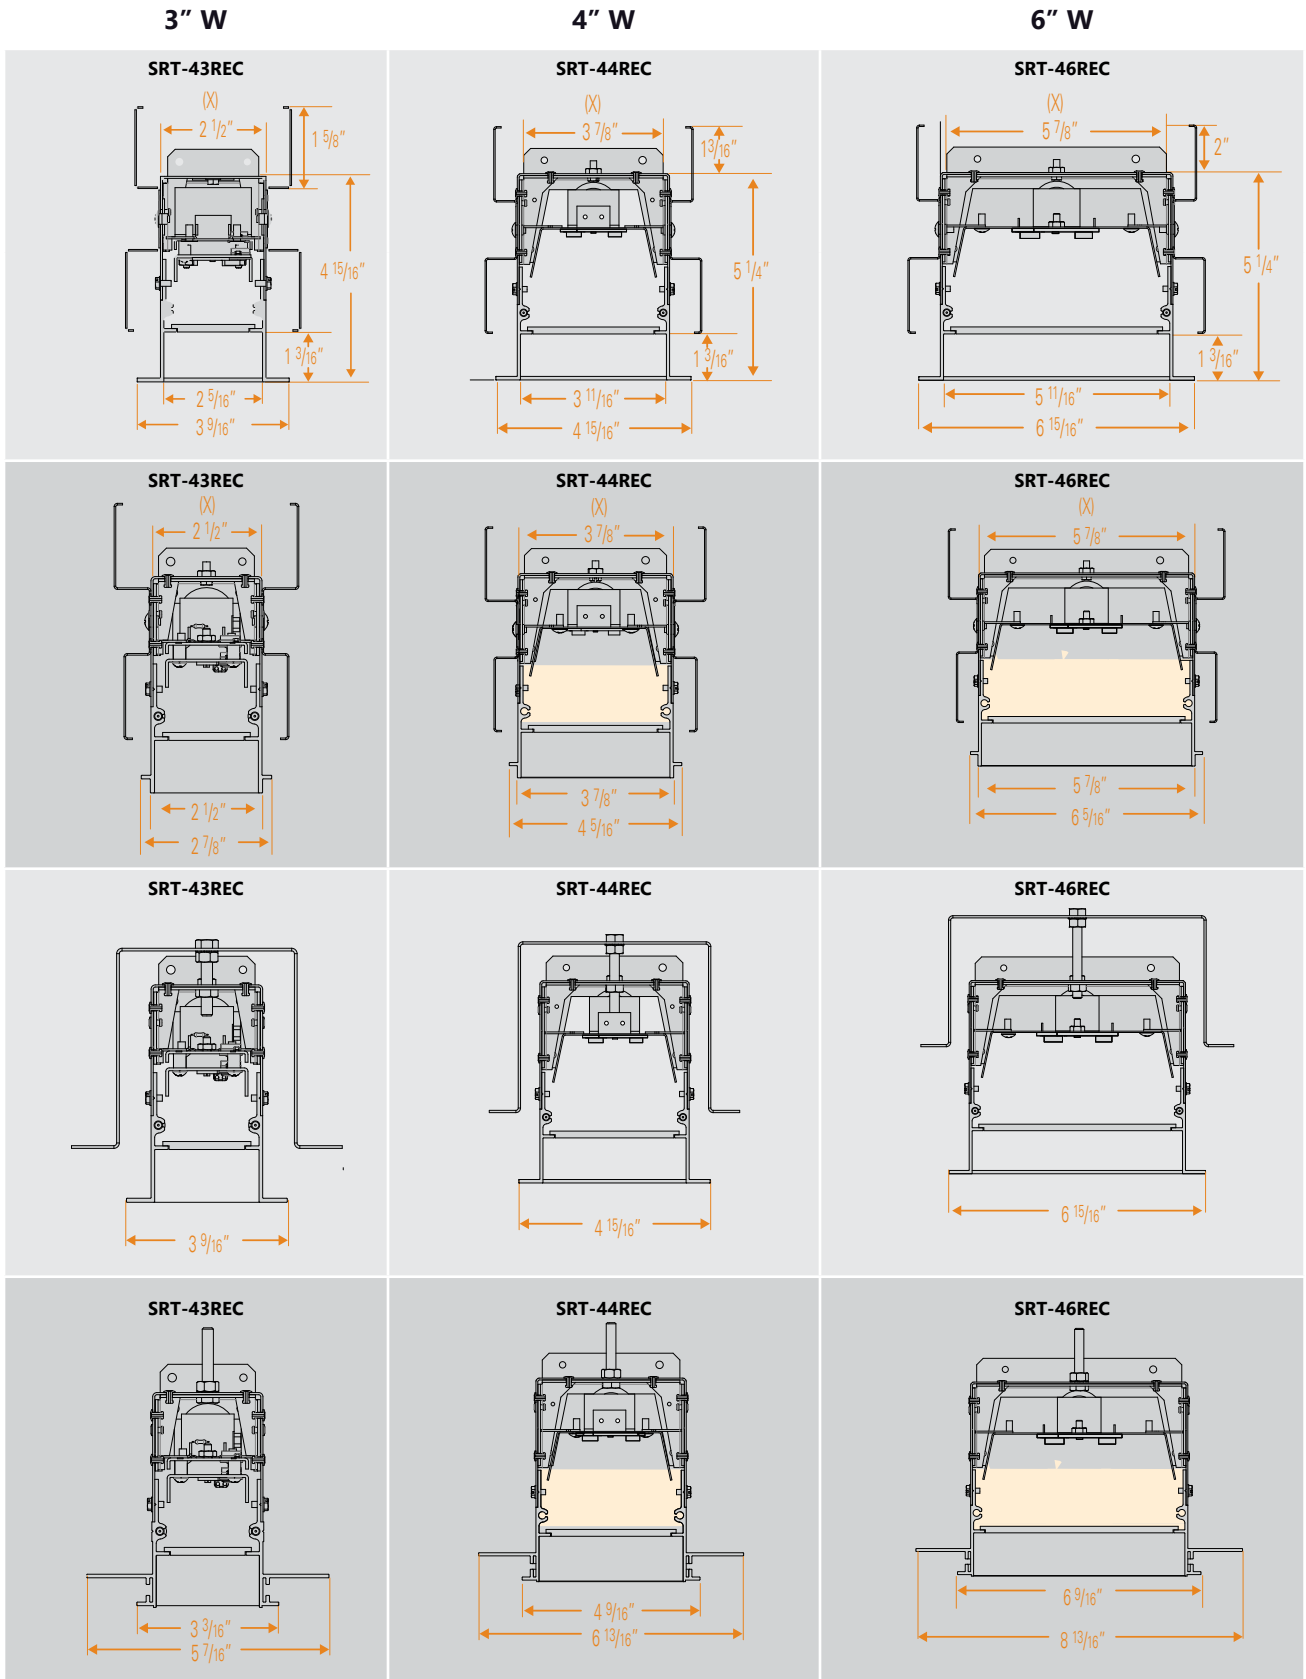




Customer Name	Date
Project Name	
Catalog Number	

PATTERN WORKSHEET


Please use this worksheet to specify your continuous run SRT or SRZ patterns. Please use the next page for all PER patterns.

Horizontal Corners

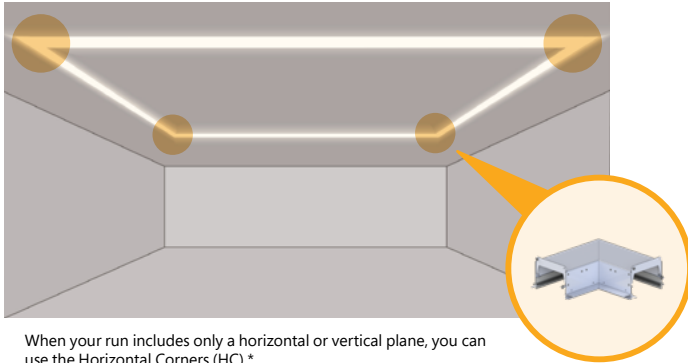


When your run includes only a horizontal or vertical plane, you can use the Horizontal Corners (HC).*

Multi-plane Transition Corners

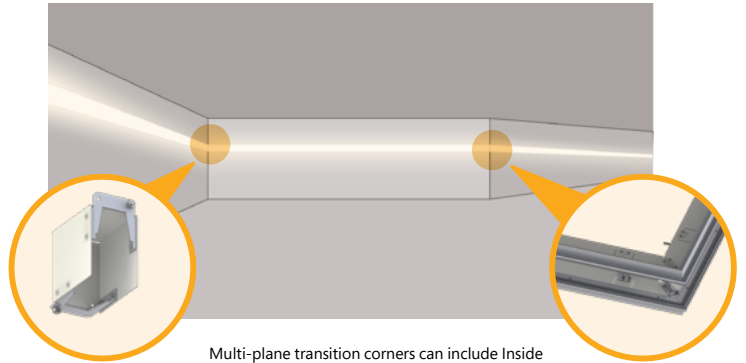


Multi-plane transition corners can include Inside and Outside Transitions (IT, OT).*

Wall-to-Ceiling Transitions Corners

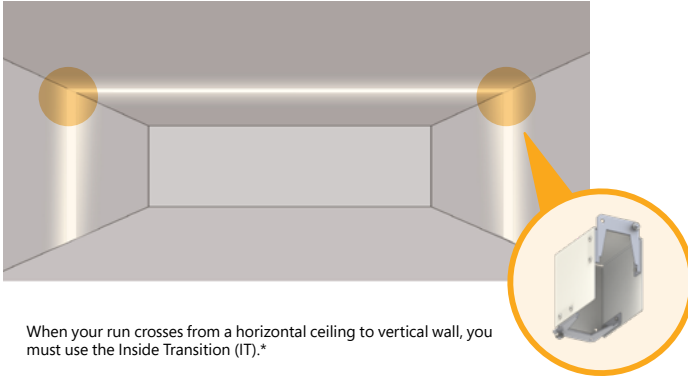

When your run crosses from a horizontal ceiling to vertical wall, you must use the Inside Transition (IT).*


Example Pattern

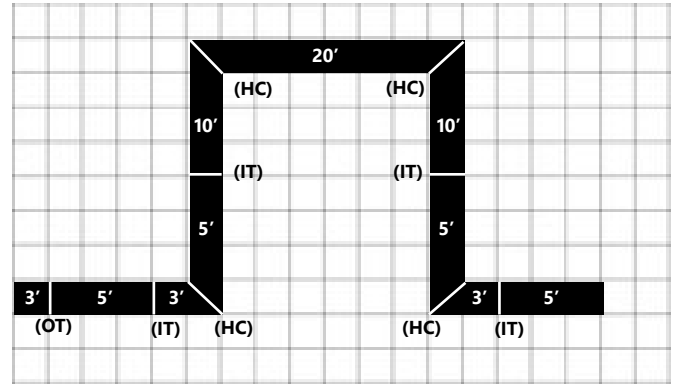

OT = 1 HC = 4 IT = 4 Linear Run = 69'

* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

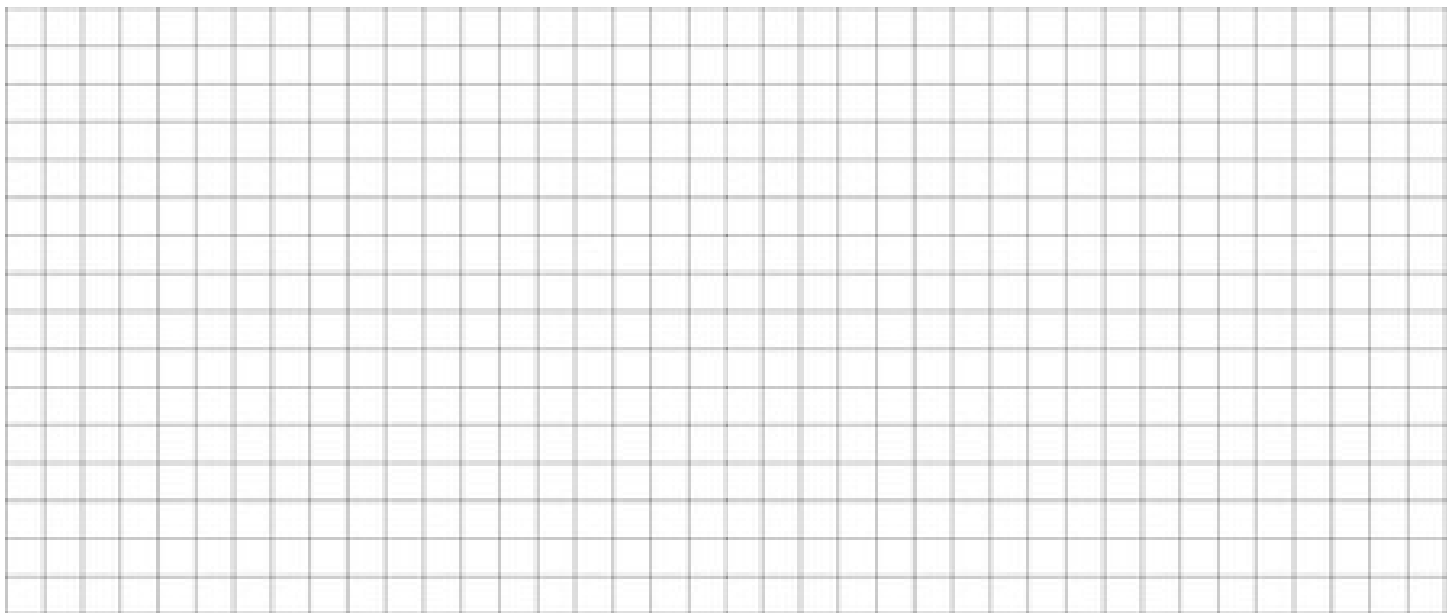

OT = HC = IT = Linear Run =

* 90 degree standard





Customer Name	Date
Project Name	
Catalog Number	

PATTERN WORKSHEET

Please use this worksheet to specify all PER patterns. Please use the previous page for your continuous run SRT or SRZ patterns.

Perimeter Corners

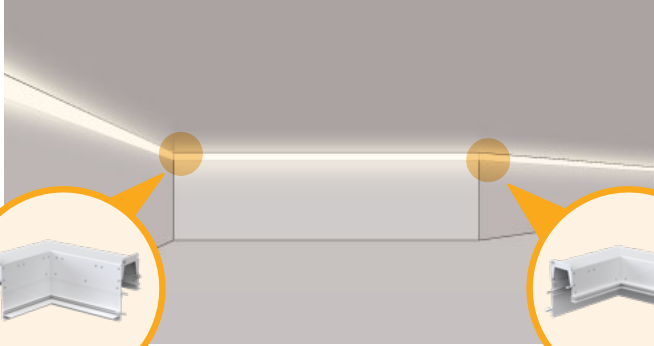


Inside



Outside

Perimeter corners can include Inside and Outside (IC, OC).*


Example Pattern

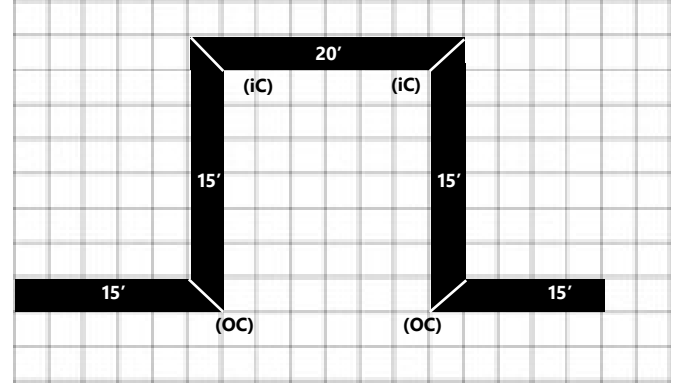

OC = 2 IC = 2 Linear Run = 80'

* Please provide drawings, architectural drawings, or renderings of your pattern/room as well.

Please use the grid below to plan out your linear footage and number of needed corners:

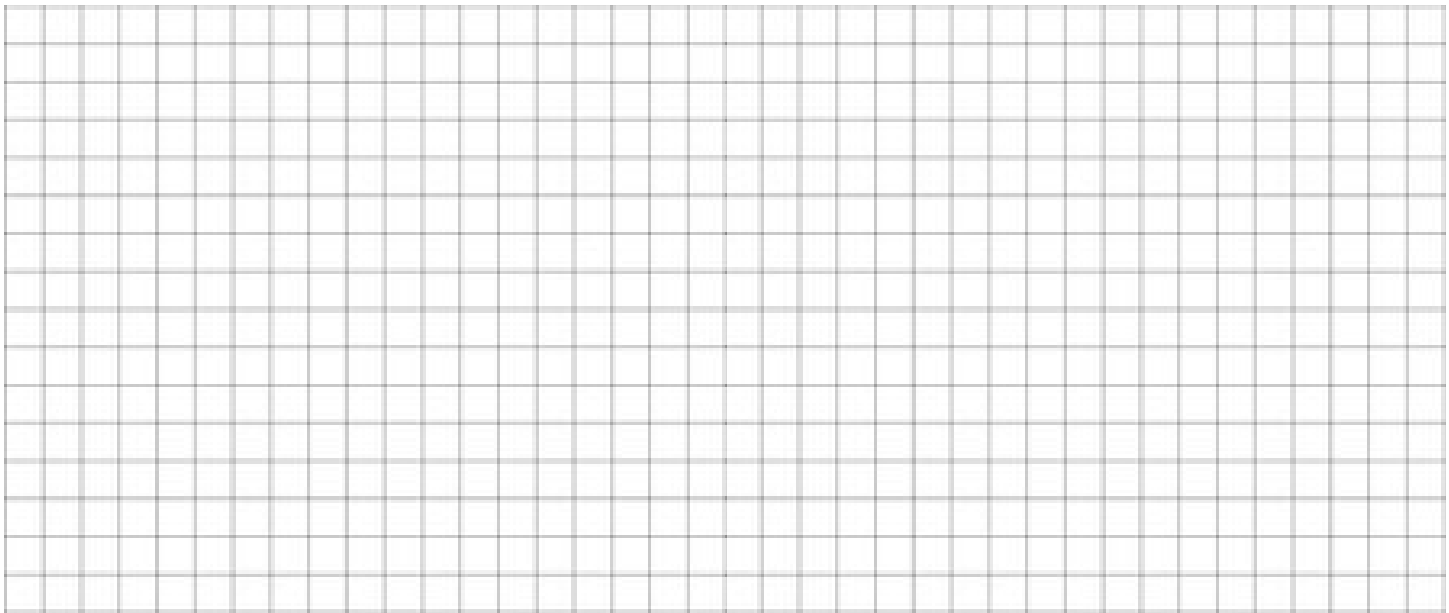

OT = HC = IT = Linear Run =


* 90 degree standard




Customer Name	Date
Project Name	
Catalog Number	

CORNER OPTIONS


Horizontal Corners

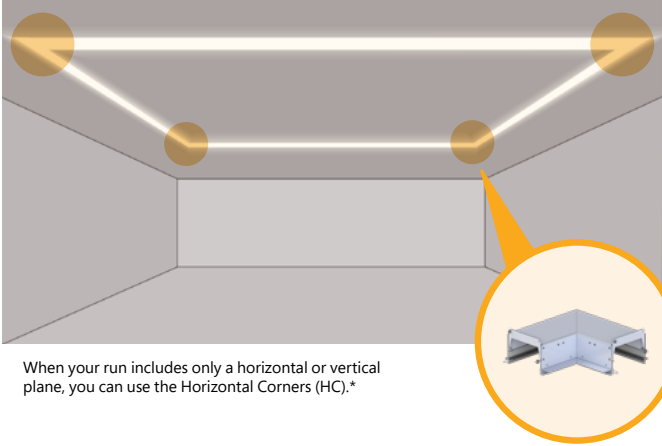


Wall-to-Ceiling Transitions Corners

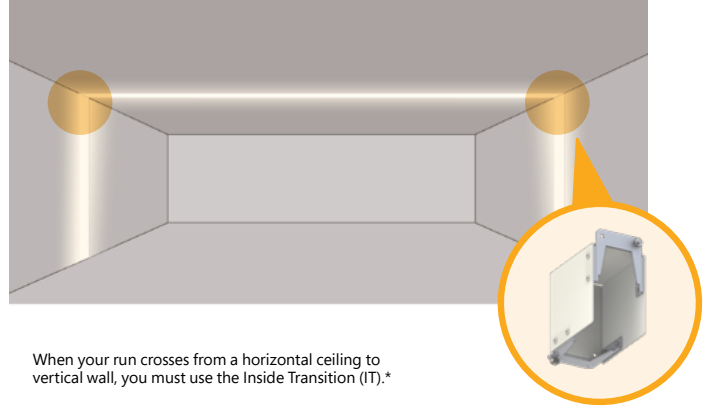

Multi-plane Transition Corners

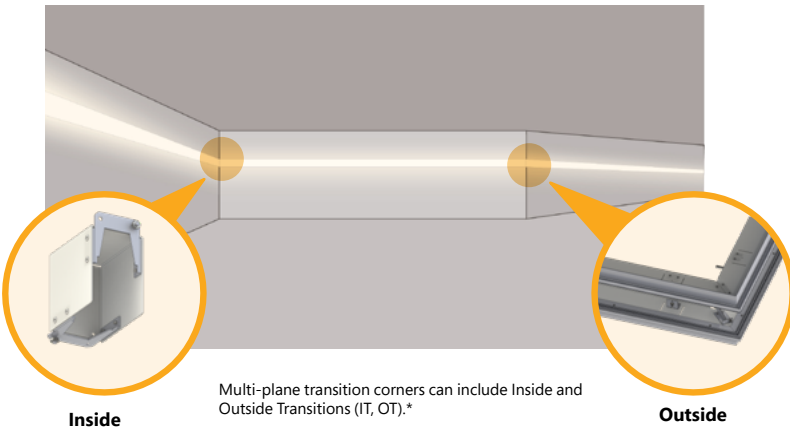

Perimeter Corners

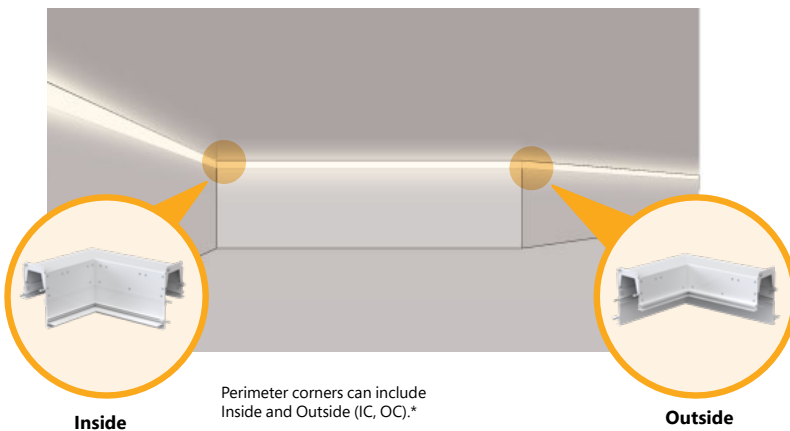


* 90 degree standard




Customer Name	Date
Project Name	
Catalog Number	

CEILING GRID


Use the guide below to determine the proper ceiling grid placement for installation of the FG/TG and BG profiles.

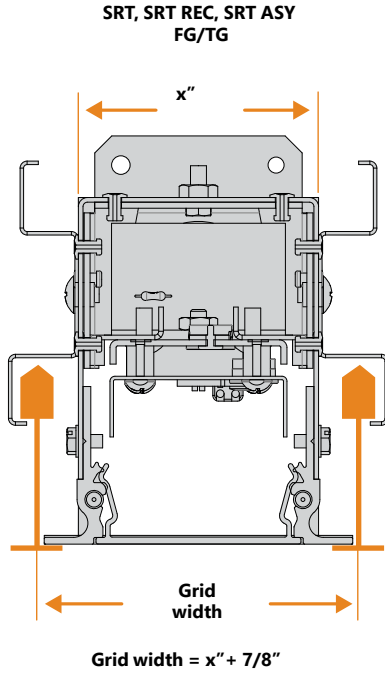


Use the width (x) provided in the charts on pages 5–7 of this document, and add 7/8".

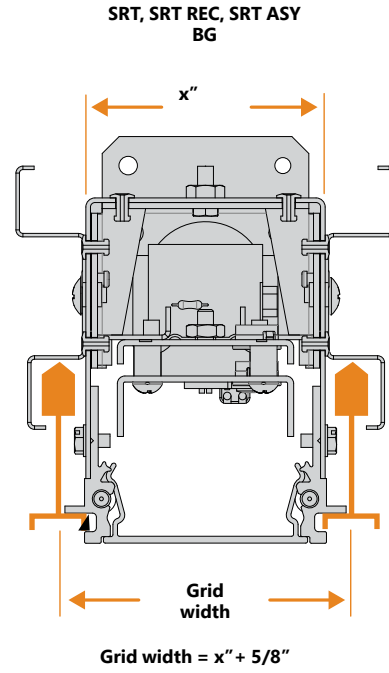

Use the width (x) provided in the charts on pages 5–7 of this document, and add 5/8".

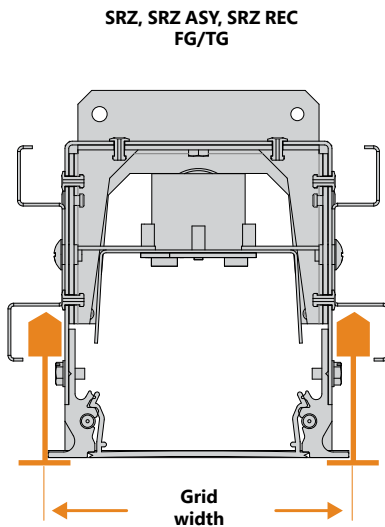

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:
 SRZ-44 ceiling grid width: = 4"
 SRZ-46 ceiling grid width: = 6"

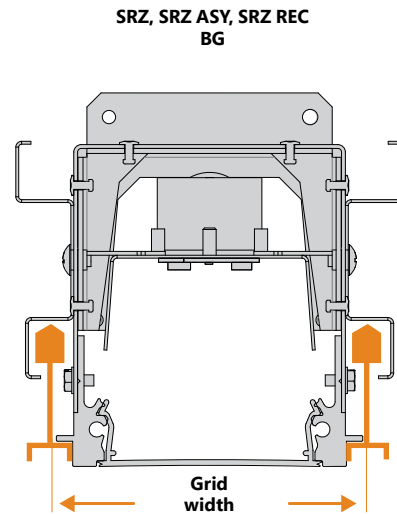

For the SRZ profiles, the ceiling grid width is the next highest whole number in relation to x:
 SRZ-44 ceiling grid width: = 4"
 SRZ-46 ceiling grid width: = 6"




Customer Name	Date
Project Name	
Catalog Number	

ENVIRONMENT INTERFACE SPECS


Each Forecast (SRT) series fixture is designed for a specific mounting application. Optical assembly, wiring, and continuous run assembly is universal across the family of fixture profiles. For more information, please consult complete Installation Instructions, available online.

FF (Flange-free) installation

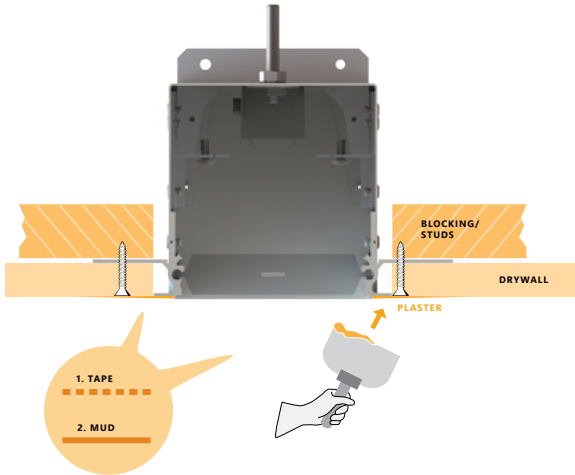



The FF (Flange-Free) fixture is installed prior to drywall installation.

F (1/2" Overlap) installation

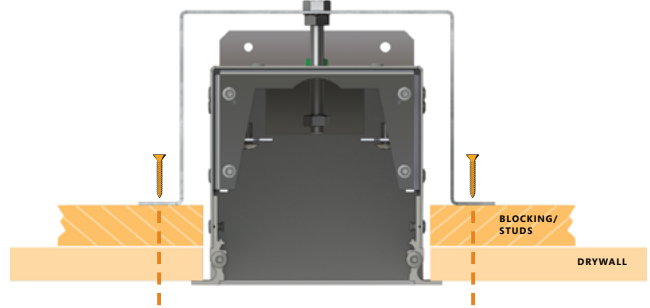

The F (1/2" Overlap) fixture is installed after drywall installation.

Fg/BG/TG Grid installation

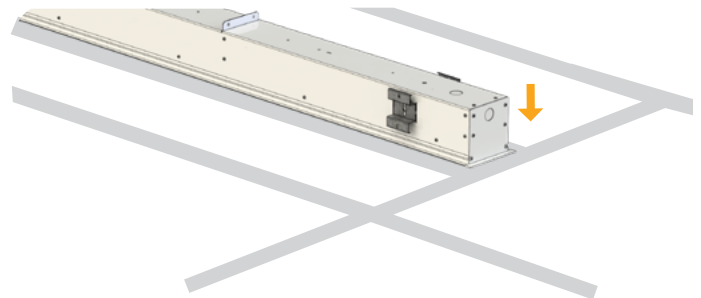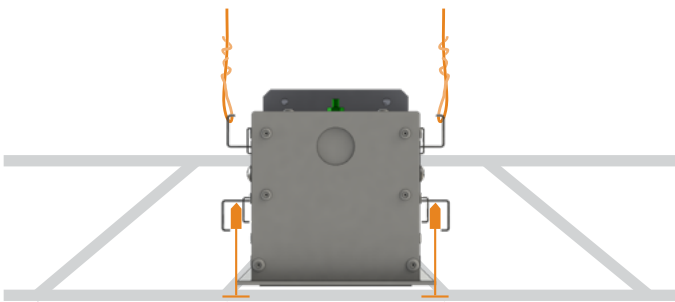


The FG/TG/BG fixture is installed within a ceiling grid system.





Customer Name	Date
Project Name	
Catalog Number	

Components and Assembly

JOINING HARDWARE

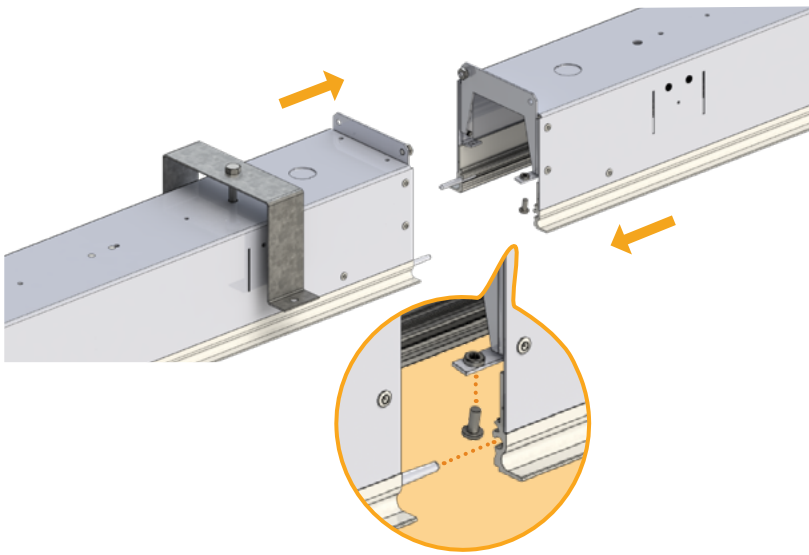


Alignment pins engage the housing profile of the adjoining units. Gasket strips along the exposed faces ensure a true fit and prevent light leak.

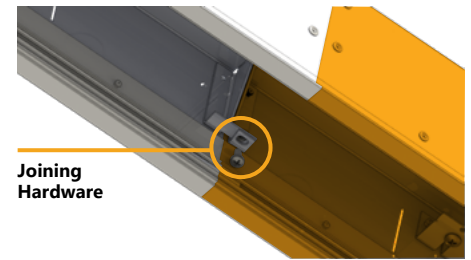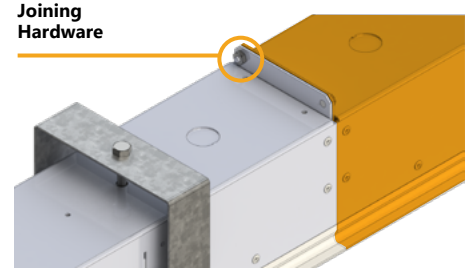

Supplied hardware draws the pieces together tightly.


LENS DETAIL

Snap-in Method

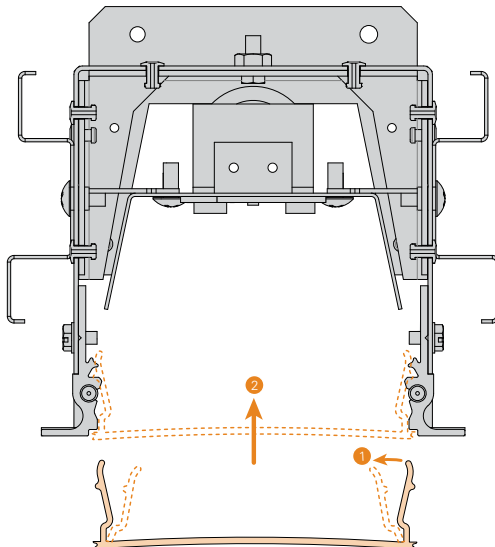

For Snap-in Lenses, gently squeeze the sides (1) while lifting into place (2). Lens will snap into position.

Lift-and-Shift Method

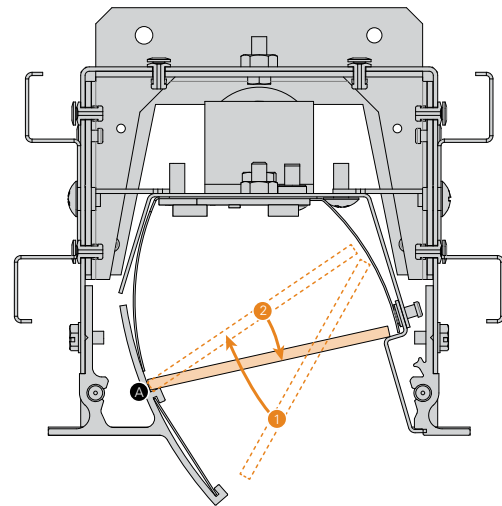

For Lift-and-Shift Lenses (used on Regressed, Perimeter, and Asymmetrical fixtures), lift lens into housing (1), rest on point A, then lower into place (2).




Customer Name	Date
Project Name	
Catalog Number	

Photometrics

Logic/Config Forecast 3-series

3841 Lumens
SRT-43REC-TG-95LED40-WOL X 4'-WH




Maximum Candela = 1594.18 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
 # 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	567.94	14.80
0-30	1184.23	30.80
0-40	1892.82	49.30
0-60	3153.03	82.10
0-80	3776.05	98.30
0-90	3841.21	100.00

ZONE	LUMENS	% OF FIXTURE
10-90	3692.98	96.10
20-40	1324.88	34.50
20-50	2016.05	52.50
40-70	1658.56	43.20
60-80	623.02	16.20
70-80	224.66	5.80
80-90	65.17	1.70
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	3841.21	100.00

Logic/Config Forecast 4-series

2633 Lumens
SRT-44REC-TG-65LED40-SAT X 4'-WH




Maximum Candela = 1594.18 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
 # 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	411.72	15.60
0-30	849.03	32.20
0-40	1337.69	50.80
0-60	2181.69	82.90
0-80	2590.47	98.40
0-90	2633.18	100.00

ZONE	LUMENS	% OF FIXTURE
10-90	2524.12	95.90
20-40	925.98	35.20
20-50	1389.77	52.80
40-70	1109.01	42.10
60-80	408.78	15.50
70-80	143.77	5.50
80-90	42.71	1.60
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	2633.18	100.00

Logic/Config Forecast 6-series

3814 Lumens
SRT-46REC-TG-95LED40-WOL X 4'-WH



Maximum Candela = 1594.18 Located At Horizontal Angle = 0, Vertical Angle = 0
 # 1 - Vertical Plane Through Horizontal Angles (0 - 180)
 # 2 - Vertical Plane Through Horizontal Angles (45 - 225)
 # 3 - Vertical Plane Through Horizontal Angles (90 - 270)

ZONE	LUMENS	% OF FIXTURE
0-20	512.35	13.40
0-30	1079.62	28.30
0-40	1757.15	46.10
0-60	3065.97	80.40
0-80	3749.64	98.30
0-90	3814.03	100.00

ZONE	LUMENS	% OF FIXTURE
10-90	3680.91	96.50
20-40	1244.81	32.60
20-50	1940.88	50.90
40-70	1756.67	46.10
60-80	683.67	17.90
70-80	235.82	6.20
80-90	64.39	1.70
90-110	0.00	0.00
90-120	0.00	0.00
90-130	0.00	0.00
90-150	0.00	0.00
90-180	0.00	0.00
110-180	0.00	0.00
0-180	3814.03	100.00



Customer Name	Date
Project Name	
Catalog Number	

Performance Data Tables

The tables below shows the delivered lumens for the various lumen outputs. Use this chart in connection with the output multiplier capability to deliver any output required

SRT-43: 3in RECESSED (DIRECT ONLY)

43	Distribution/Output	Lumens/Ft	W/Ft	Efficacy
	D035	350	3.8	92
	D040	400	4.3	93
	D045	450	4.8	94
	D050	500	5.3	94
	D055	550	5.8	95
	D060	600	6.4	94
	D065	650	6.9	94
	D070	700	7.5	93
	D075	750	8.1	93
	D080	800	8.6	93
	D085	850	9.2	92
	D090	900	9.8	92
	D095	950	10.4	91
	D100	1000	11.1	90
	D105	1050	11.7	90

SRT-44: 4in RECESSED (DIRECT ONLY)

44	Distribution/Output	Lumens/Ft	W/Ft	Efficacy
	D035	350	3.8	92
	D040	400	4.3	93
	D045	450	4.8	94
	D050	500	5.3	94
	D055	550	5.8	95
	D060	600	6.4	94
	D065	650	6.9	94
	D070	700	7.5	93
	D075	750	8.1	93
	D080	800	8.6	93
	D085	850	9.2	92
	D090	900	9.8	92
	D095	950	10.4	91
	D100	1000	11.1	90
	D105	1050	11.7	90

SRT-46: 6in RECESSED (DIRECT ONLY)

46	Distribution/Output	Lumens/Ft	W/Ft	Efficacy
	FORECAST - 6in	350	3.8	92
	D040	400	4.2	95
	D045	450	4.7	96
	D050	500	5.2	96
	D055	550	5.8	95
	D060	600	6.3	95
	D065	650	6.8	96
	D070	700	7.4	95
	D075	750	7.9	95
	D080	800	8.5	94
	D085	850	9.1	93
	D090	900	9.6	94
	D095	950	10.2	93
	D100	1000	10.8	93
	D105	1050	11.5	91
	D110	1100	12.1	91
	D120	1200	13.4	90

OUTPUT MULTIPLIER TABLE

Photometrics and outputs published on this spec sheet are based on nominal 3500K temperature. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.

CCT	80 CRI
3000K	0.98
3500K	1
4000K	1.03

Lens	Multiplier
SAT	1.00
WOL	0.84



Forecast Series

3, 4, 6 Regressed Lens

Customer Name	Date
Project Name	
Catalog Number	

CONSTRUCTION

Housing:	Extruded aluminum, machined endcaps
Lens:	Satin frosted, and white opal lenses.
Optical Assembly:	.040" aluminum in a pre-paint white finish. Fully wired unit remains completely accessible from below via ballast panel.
Paint:	Black, White, Silver, Custom Color

OPTICAL SYSTEM

Lumens:	430-1710 lm/ft
Distribution:	Direct
Efficacy:	Up to 117 LPW
Wattage:	6.5 - 9.5 watts/ft
CCT:	2700k, 3000K, 3500K, 4000K, 5000K
CRI (Min):	TriGain® 90CRI
R9 (Min):	65
Color Consistency:	2SDCM

ELECTRICAL

Input Voltage:	120V, 277V, Universal Voltage
Input Frequency:	50/60Hz
Power Factor (PF):	>0.9
Total Harmonic Distortion (THD):	<16% - 120V <20% - 277V
Thermal Protection:	Type IC Inherently Protected
Temperature / Humidity:	Suitable for Damp Locations
Transient Protection:	All Non-Lutron = 2.5KV Lutron = 4KV

CONTROLS

Dimming:	0-10V 1% power class; Lutron Hi-lume 1% 2-wire LED driver; Lutron Hi-lume 1% 3-wire LED driver; Lutron Hi-lume 1% EcoSystem LED driver; Lutron Hi-lume 1%-H EcoSystem LED driver with soft-On Fade-to-Black; Lutron 5-Series EcoSystem LED driver; Digitally Addressable Lighting Interface; Custom Dimming
-----------------	---

OPERATING TEMPERATURE

Product	Operating Temperature
STD (Non-EM) Options	-30-25°C (-22-77°F)
3/4/6in w/Battery	0-25°C (32-77°F)

LUMEN MAINTENANCE

- L70>50K Hours

MOUNTING

- Recessed
- Hard Ceiling
- Flange-free Sheetrock
- Multiple Tegular Grid Ceiling Options (see pg 7)

DESIGN LIFE & WARRANTY

- Warranty:**
- LED boards - 5 years
 - LED drivers (standard) - 5 years
 - LED drivers (Lutron) - 3 years



For Product or Technical Questions:

E: INFO@FORUMLIGHTING.COM
T: +1 412 781 5970